SECURITY DOOR CONTROLS ■ WWW.SDCSECURITY.COM
801 Avenida Acaso, Camarillo, CA 93012
[t] 800.413.8783 ■ 805.494.0622 ■ E-mail: service@sdcsecurity.com

TEMPLATE-S6102-SP02
Devices covered by this template:
Panic / Fire Rim Exit Device with 02 Dummy Pull Plate
RHR PREP

FOLD HERE

CAUTION
DO NOT USE DOOR EDGE

THIS SIDE UP FOR RHR DOOR

PLACE THIS SIDE ON DOOR

PLACE THIS SIDE ON FRAME STOP

(4x) DEVICE MOUNTING HOLES (4th hole shown on Trim Template)
TRIM: DRILL 5/16" CLEARANCE HOLES ON PUSH SIDE, 15/32" HOLES ON PULL SIDE.

1-9/16"

25/32"

TO FACE OF STOP

2-7/16"

(2x) END CAP BRACKET HOLES
METAL: DRILL / TAP FOR 1/4"-20 MACHINE SCREWS.

WOOD: PRE-DRILL 1/8" HOLES.

SEXBOLTS: DRILL 5/16" CLEARANCE HOLES ON PUSH SIDE, 3/8" ON PULL SIDE.

9/16"

2-9/32"

℄ OF DEVICE

1-3/16"

19/32"

OPTIONAL 1/2"dia. WIRE RUN

AFTER EXIT DEVICE IS MOUNTED, INSTALL END CAP BRACKET CENTERED ON DEVICE ℄

2-3/4"

8-3/16"

4th Hole is off template. Refer to Trim Template for inside and outside install.

40"

Watch for special mounting height requirements

FINISHED FLOOR

(2x) STRIKE MOUNTING HOLES
METAL: DRILL / TAP FOR 1/4" – 20 MACHINE SCREWS

WOOD: PRE-DRILL 1/8" HOLES

℄ OF DEVICE

2-5/8"

℄ OF STRIKE

DRILL / TAP FOR 12-24 AND INSTALL SCREW AFTER FINAL ADJUSTMENTS

1-3/32"

DOOR

FRAME STOP

FOLD HERE

Any suggestions or comments to this instruction or product are welcome. Please contact us through our website or email engineer@sdcsecurity.com

SDC
SECURITY DOOR CONTROLS ■ WWW.SDCSECURITY.COM
801 Avenida Acaso, Camarillo, CA 93012
[t] 800.413.8783 ■ 805.494.0622 ■ E-mail: service@sdcsecurity.com

TEMPLATE-S6102-SP02
Devices covered by this template:
Panic / Fire Rim Exit Device with 02 Dummy Pull Plate
LHR PREP

THIS SIDE UP FOR LHR DOOR

FOLD HERE

CAUTION
DO NOT USE DOOR EDGE

PLACE THIS SIDE ON FRAME STOP

PLACE THIS SIDE ON DOOR

(2x) STRIKE MOUNTING HOLES
METAL: DRILL / TAP FOR 1/4" – 20 MACHINE SCREWS

WOOD: PRE-DRILL 1/8" HOLES

(4x) DEVICE MOUNTING HOLES (4th hole shown on Trim Template)
TRIM: DRILL 5/16" CLEARANCE HOLES ON PUSH SIDE, 15/32" HOLES ON PULL SIDE.

(2x) END CAP BRACKET HOLES
METAL: DRILL / TAP FOR 1/4"-20 MACHINE SCREWS.

WOOD: PRE-DRILL 1/8" HOLES.

SEXBOLTS: DRILL 5/16" CLEARANCE HOLES ON PUSH SIDE, 3/8" ON PULL SIDE.

1-9/16"

25/32"

TO FACE OF STOP

2-7/16"

2-9/32"

9/16"

℄ OF STRIKE

-2-5/8"

℄ OF DEVICE

1-3/16"

19/32"

OPTIONAL 1/2"dia. WIRE RUN

2-3/4"

AFTER EXIT DEVICE IS MOUNTED, INSTALL END CAP BRACKET CENTERED ON DEVICE ℄

DRILL / TAP FOR 12-24 AND INSTALL SCREW AFTER FINAL ADJUSTMENTS

1-3/32"

ADJUST FOR BEST FIT

8-3/16'

4th Hole is off template. Refer to Trim Template for inside and outside install.

40"

Watch for special mounting height requirements

FINISHED FLOOR

FRAME STOP

DOOR

FOLD HERE

SECURITY DOOR CONTROLS ■ WWW.SDCSECURITY.COM
[t] 800.413.8783 ■ 805.494.0622 ■ E-mail: service@sdcsecurity.com ■ 801 Avenida Acaso, Camarillo, CA 93012 ■ PO Box 3670, Camarillo, CA 93011

TEMPLATE

TEMP-SP02
SATURN ESCUTCHEON 02 DUMMY PULL PLATE

Note;
This template is used for Rim Mount and Surface Mount Vertical Rod Devices. It is not available for Concealed Vertical Rod Exit Devices and Mortise exit devices.
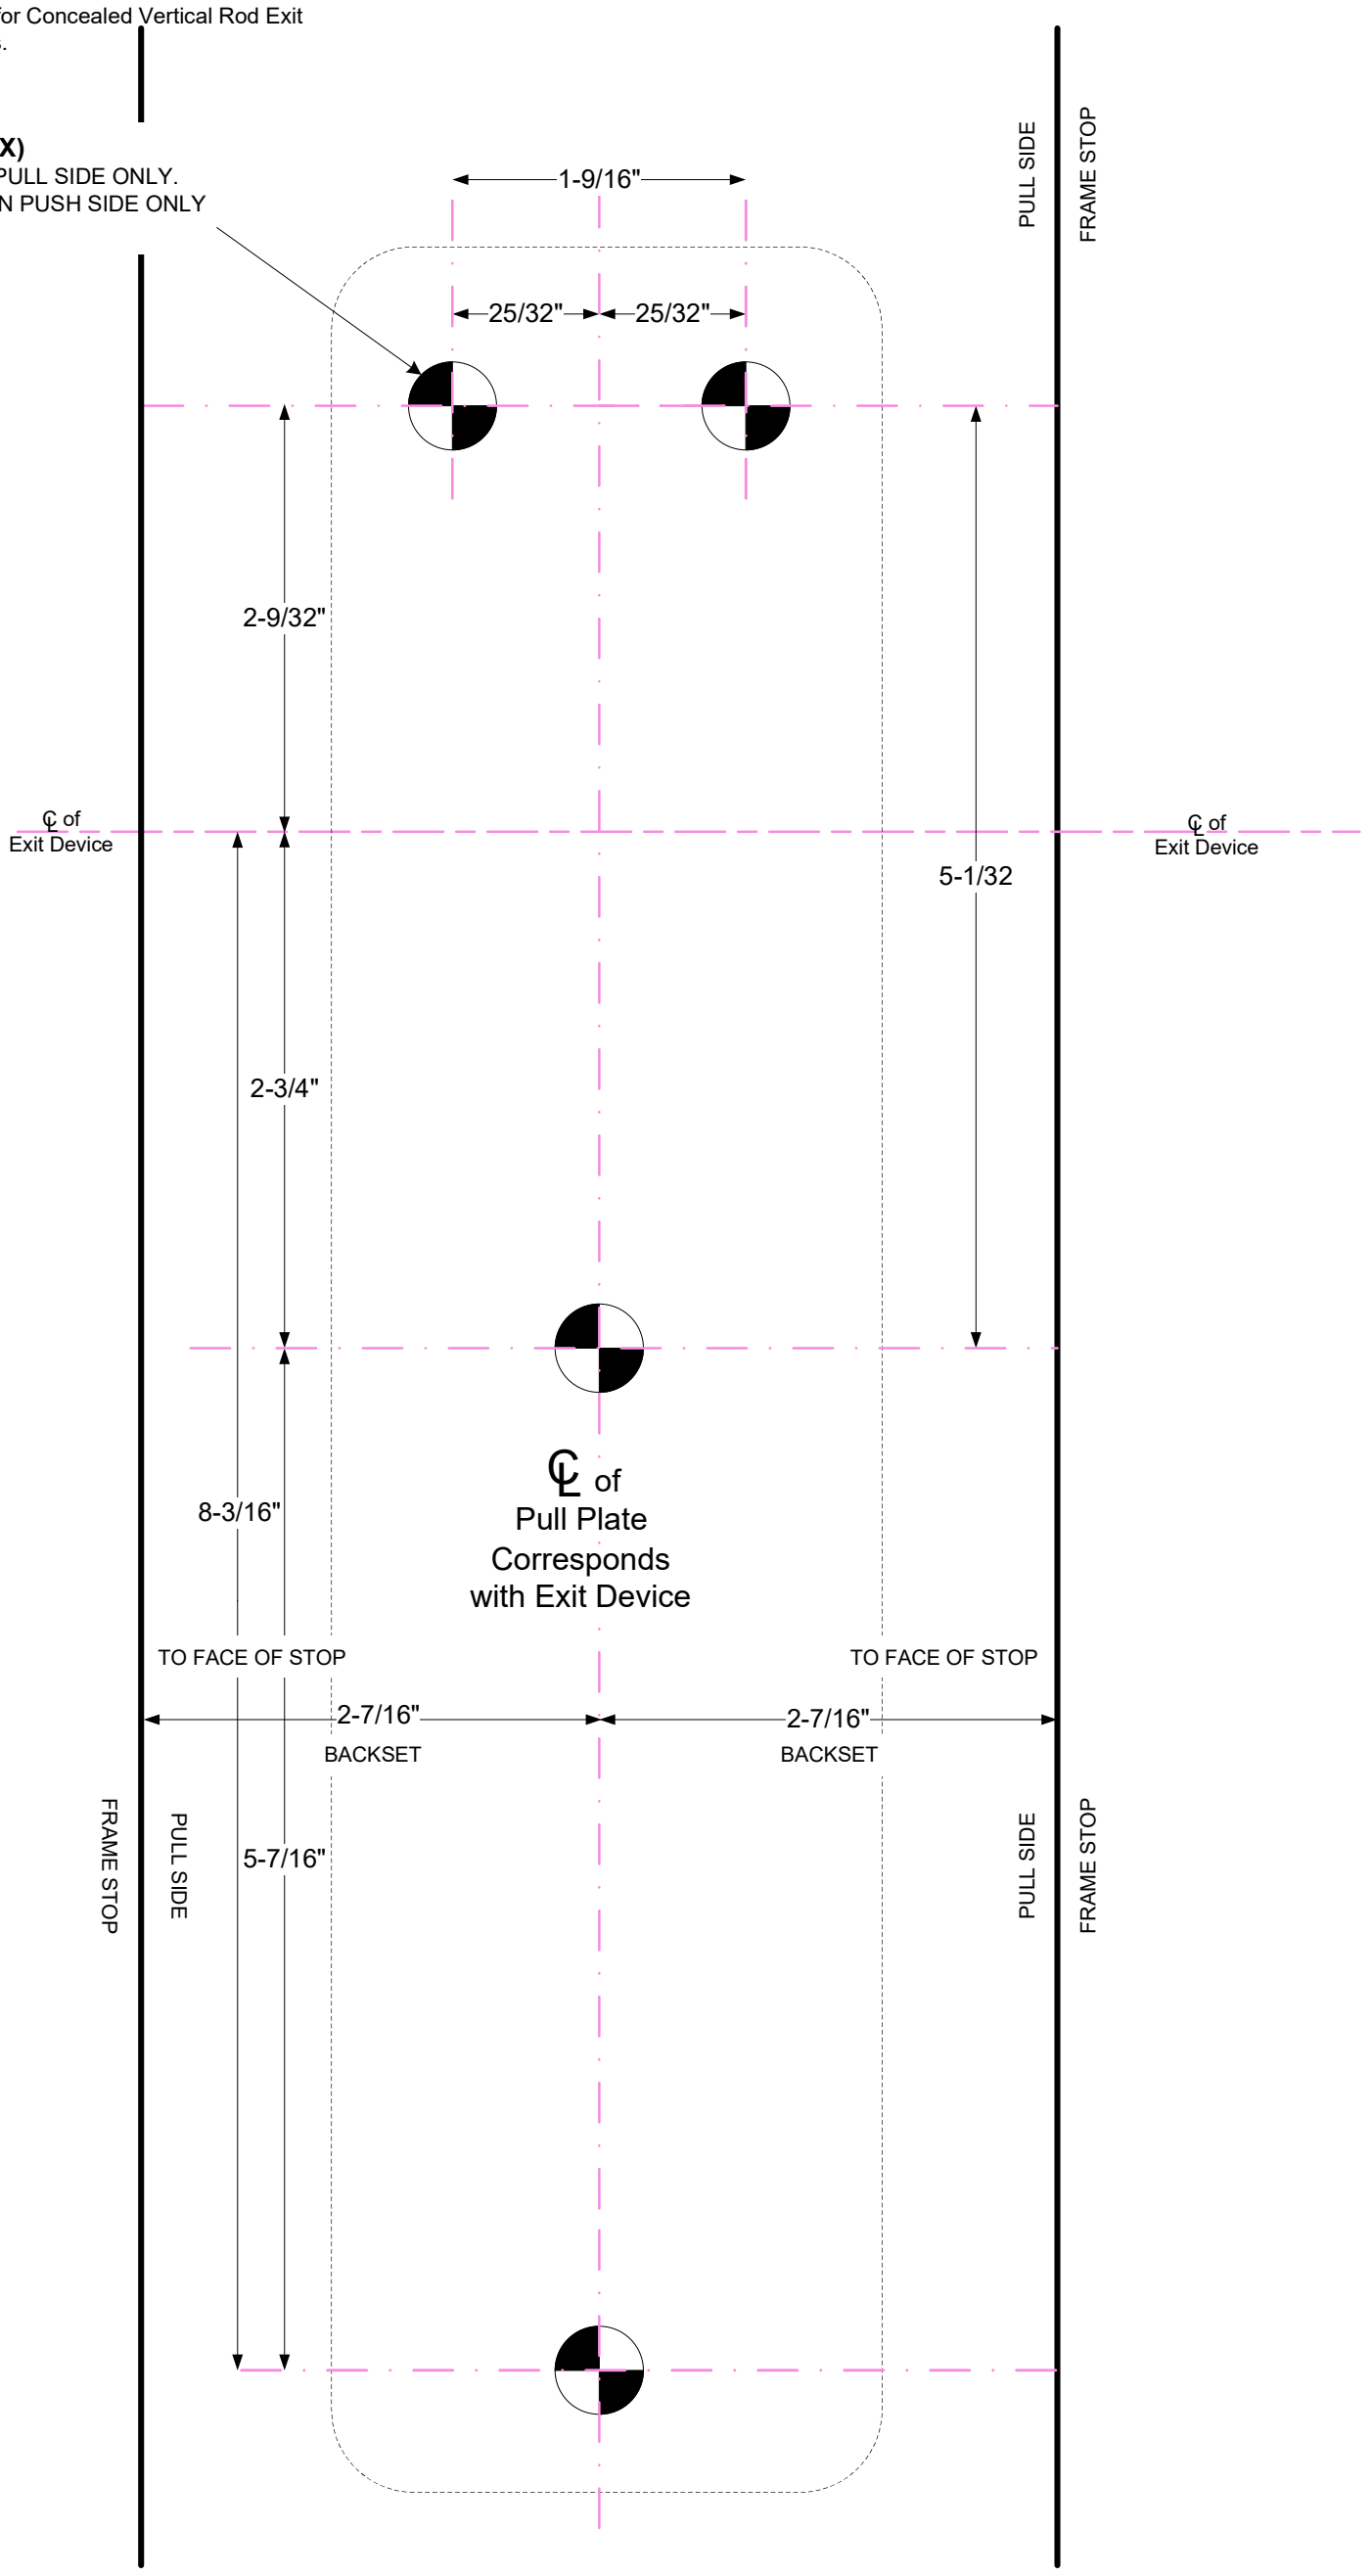
CAUTION
DO NOT USE DOOR EDGE