



E5 Access Control System

Choice of Prox Card, Fingerprint or Keypad Entry


- Standalone or PC Managed
- Network up to 99 Readers

Features


- HID Compatible Proximity reader
- Up to 4" read range
- 3000 cardholders
- Network configuration up to 99 devices
- Anti-passback
- Access mode
- 6 time zones
- 12 month programmable holiday schedule
- Password Required time zone
- Guard Patrol Function
- Door prop open alarm
- Forced entry alarm
- Access mode selectable
 1. Proximity card only
 2. Proximity card + PIN
 3. Key-in card number only
- Communication interface: RS232 or RS485
- Can be used as stand alone device without personal computer connected
- Use of password is time zone programmable if card data with password access selected
- Two types alarm status available
 1. Force entry
 2. Door prop open alarm
- Power saver function. The LED backlight turns itself off after 3 minutes
- Lock relay activation time, alarm function, anti-duress and door prop open alarm are individually programmable from 1 to 255 seconds
- Communication baud rate can be programmed via keypad
- Memory Buffer – 3500 transactions
 1. Invalid Card.
 2. Restricted time.
 3. Time zone unmatched.
 4. Code unmatched.



NETWORK CONFIGURATION

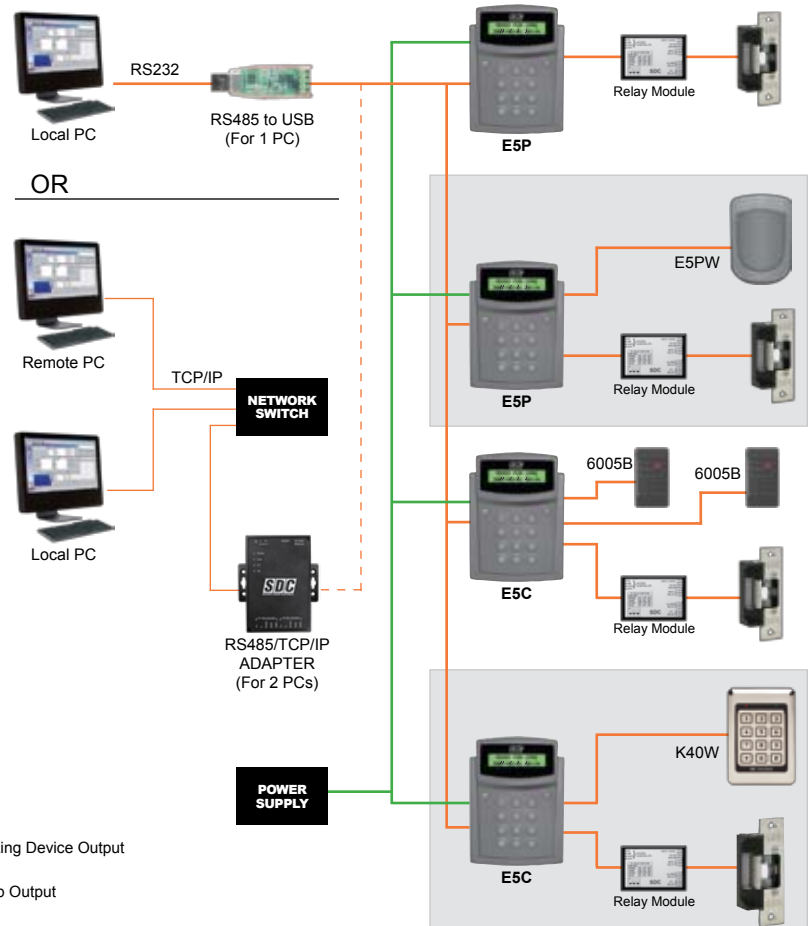

STANDALONE CONFIGURATION

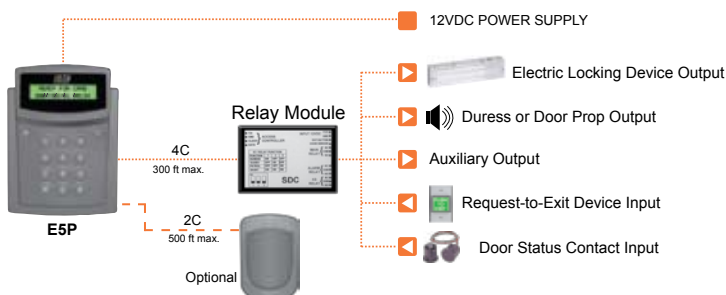

SECURITY DOOR CONTROLS

sdsecurity.com service@sdsecurity.com

