




INSTALLATION INSTRUCTIONS

432KLDUR LOCKDOWN PUSH SWITCH

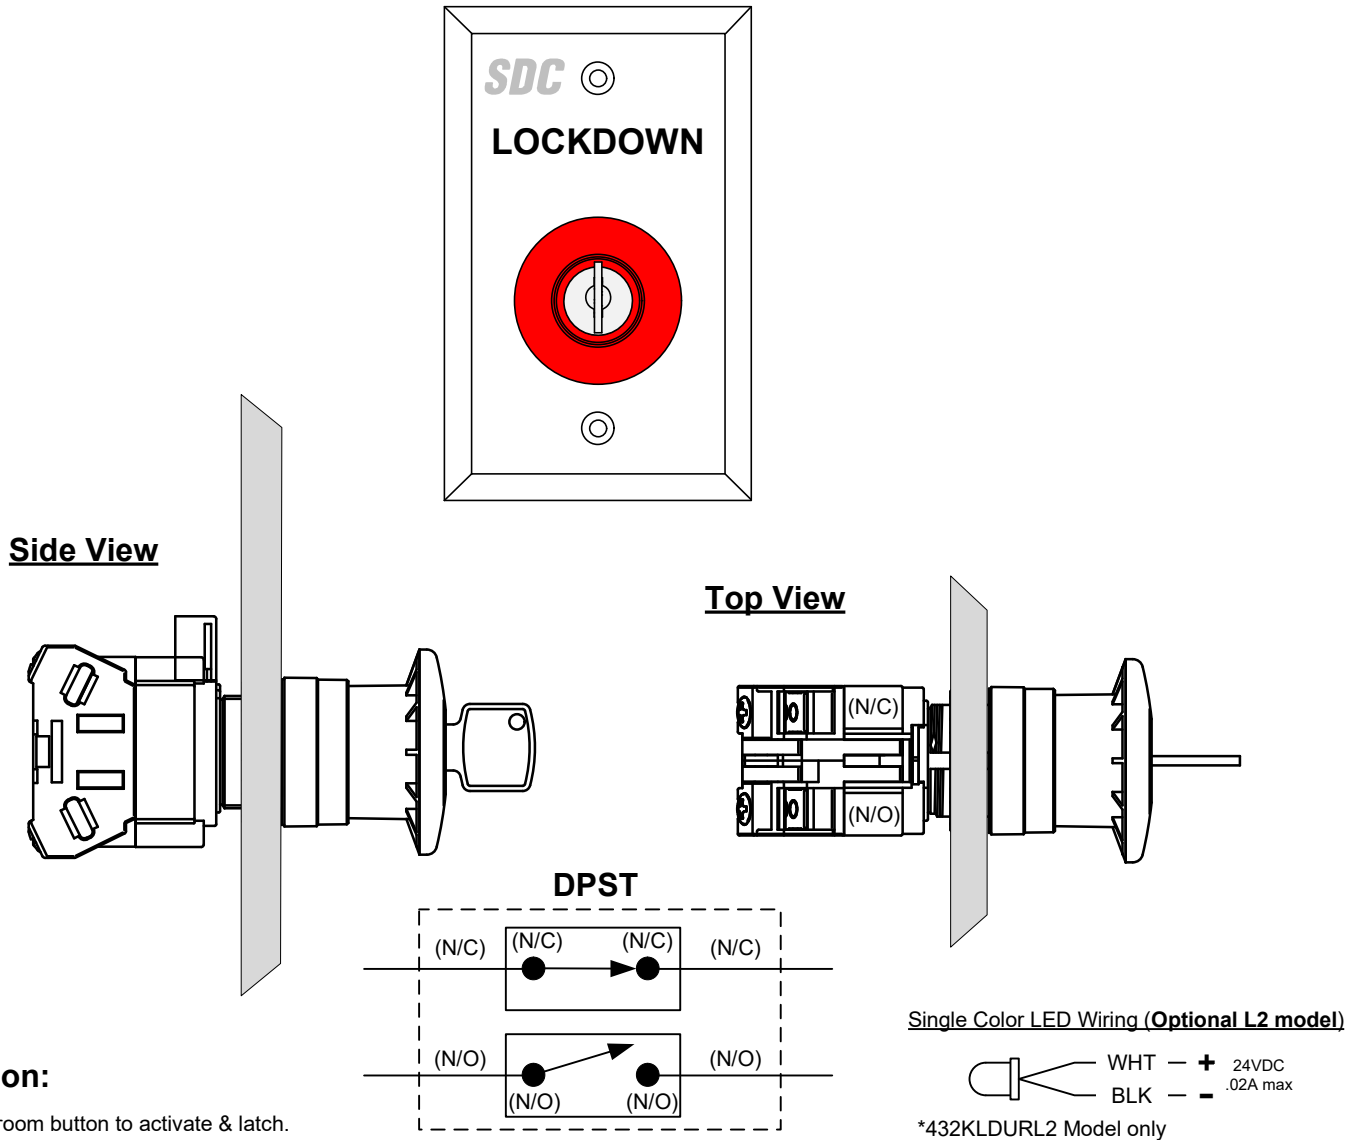

Operation:

Push mushroom button to activate & latch.
Insert key & turn clockwise to reset.

Specification:

Mounting : Single-Gang, 2" Depth Min.
 Overall Dimensions : 2-7/8" H x 4-5/8" W x 3-1/4" D
 (De-Activated, Less Key)
 Plate Finish : 630 (US32D)
 Contact Type : DPST (1 N/C & 1 N/O)
 Contact Rating : 24VDC @ 3 AMPS (Resistive/Inductive)
 Wire Size : 12~22AWG (Single)

UL 294 Performance Rating

Level I : Line Security / Destructive Attack / Standby Power
 Level IV : Endurance
 To be used with a Class 2 power supply or voltage compatible UL 294 or UL 603 listed power supply
 Compliance with ANSI/NFPA 70 National Electrical Code
 All peripheral modules for UL compliance are required to be UL Listed UL 294.