
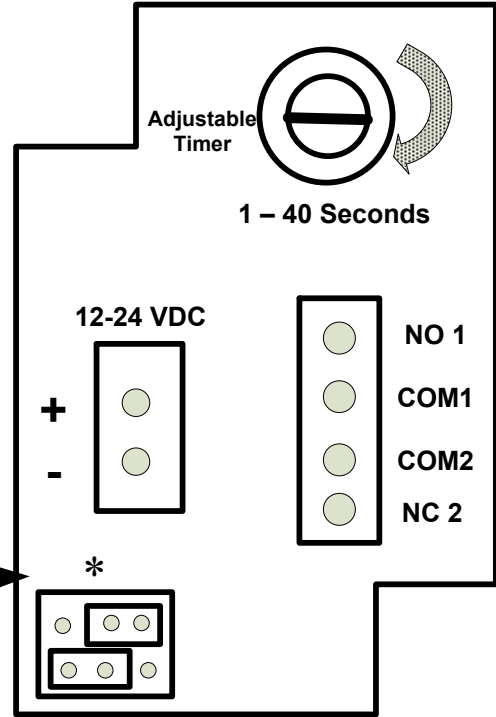


SDC Security Door Controls

3580 Willow Lane, Westlake Village, CA 91361-4921 • (805) 494-0622 • Fax: (805) 494-8861
 www.sdcsecurity.com • E-mail: service@sdsecurity.com

INSTALLATION INSTRUCTIONS MODEL 460 REQUEST – TO – EXIT - SWITCH

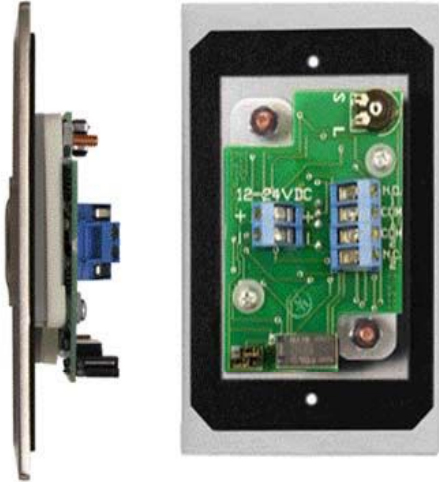

With the jumpers * as shown the red LED's are on in stand-by and the green LED's turn on when the relay is on.

Specifications

Input Voltage: 12/24VDC

Current:

LED On: Idle-60mA, Active 120mA
 LED Off: Idle-10mA, Active-60mA

Outputs:

1 N.O., 1 N.C., 2 Amp @ 30VDC


Switch Operating Environment

-40° F to +160°F (-40° C to +70°C)


Dimensions

4.5" H x 2.75" W x 1.25" D
 (11.4 x 7 x 3.2 cm)


Selectable Bi-color Illumination Status
 Relay Off – Red, Green or None
 Relay On – Red, Green or None



**Red On – Standby
 Green On – Relay Action**



**Red On – Relay Active
 Green On - Standby**



**Red Off
 Green Off**