


**Panic & Fire Rated Exit Devices ANSI / BHMA Grade 1**

**SDC S6000 Spectra™ Series** panic and fire rated exit devices are available in rim mount, mortise and surface vertical rod configurations. Spectra Class mechanical exit devices are UL listed and ANSI A156.3 Grade 1 compliant and comply with all national and state building and fire life safety codes.

- ANSI/BHMA A156.3-2001 Grade 1 Compliant
- CA Title 19 Compliant
- Meets/Exceeds ADA requirements
- UBC 97, Standard 7.2

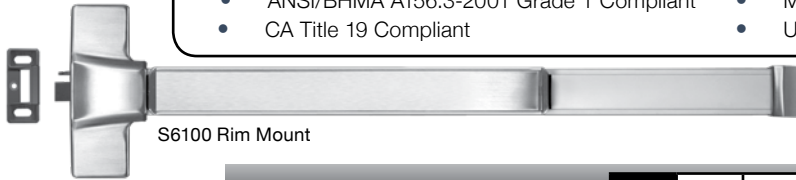


S6100 Rim Mount

SPECTRA SERIES EXIT DEVICE            LIST

<b>S61</b>	Rim mount exit device	<b>621.00</b>
<b>S62</b>	Surface vertical	<b>932.00</b>

SPECIFY FUNCTION

<b>01</b>	Exit Only, No Trim	<b>N/C</b>
<b>02</b>	Dummy Pull or Lever (opens when dogged)	<b>N/C</b>
<b>03</b>	Entrance by trim when latch is released by key	<b>N/C</b>
<b>08</b>	Lever with key locks/unlocks lever	<b>N/C</b>
<b>14</b>	Lever trim always active	<b>N/C</b>

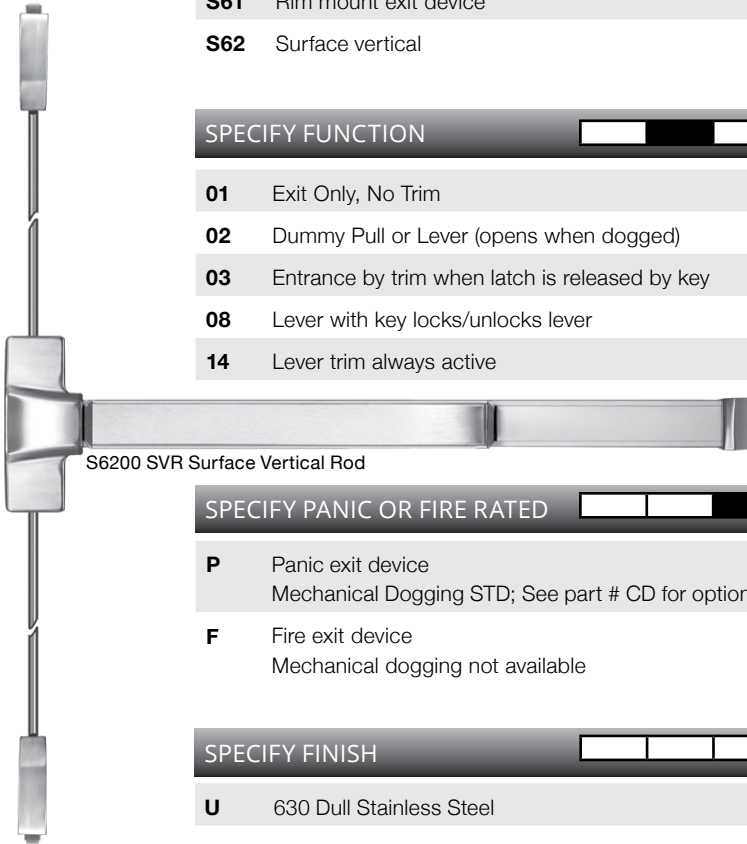

S6200 SVR Surface Vertical Rod

SPECIFY PANIC OR FIRE RATED                      Add to List

<b>P</b>	Panic exit device Mechanical Dogging STD; See part # CD for optional key cylinder dogging	<b>N/C</b>
<b>F</b>	Fire exit device Mechanical dogging not available	<b>114.00</b>

SPECIFY FINISH                      Add to List

<b>U</b>	630 Dull Stainless Steel	<b>N/C</b>
----------	--------------------------	------------

SPECIFY LENGTH                      Add to List

<b>36</b>	For 36" Door	<b>N/C</b>	<b>42</b>	For 42" Door	<b>21.00</b>	<b>48</b>	For 48" Door	<b>42.00</b>
-----------	--------------	------------	-----------	--------------	--------------	-----------	--------------	--------------

SPECIFY OPTIONS                      Add to List

<b>R</b>	Request-To-Exit Output, SPDT	<b>104.00</b>	<b>L</b>	Latch Status Output, SPDT	<b>104.00</b>
----------	------------------------------	---------------	----------	---------------------------	---------------

**For 62 Series devices only:**

<b>LBR</b>	Less Bottom Rod, for Panic Devices	<b>N/C</b>	<b>LBRF</b>	Less Bottom Rod, for Fire Rated devices	<b>N/C</b>
------------	------------------------------------	------------	-------------	---	------------



S6200-LBR SVR

# Device Trim

Distributor Discount Code **XK**



EK Eclipse

### Standard Active and Dummy Trim

SPECIFY TRIM RIM AND VERTICAL ROD

Add to List

#### Standard Trim

<b>EK Eclipse</b>	<b>GK Galaxy</b>	<b>233.00</b>
<b>SP Saturn</b>		<b>104.00</b>



GK Galaxy

SPECIFY TRIM FUNCTION

Add to List

<b>Dummy Trim</b>	EK02, GK02, SP02	<b>N/C</b>
<b>Key Retracts Latchbolt</b>	EK03, GK03, SP03	<b>N/C</b>
<b>Key Locks/Unlocks Lever</b>	EK08, GK08	<b>N/C</b>
<b>No Cylinder Lever Always Active</b>	EK14, GK14	<b>N/C</b>



SP Saturn

SPECIFY TRIM FINISH

Add to List

<b>U 630 Dull Stainless Steel</b>	<b>N/C</b>
-----------------------------------	------------

#### OPTIONS

Add to List

<b>CD</b>	Rim cylinder required for 03 functions Keyed dogging (Specify key cylinder separately) (not available with (F) fire exit device)	1 key cylinder required for CD option	Mortise cylinder required for 08 functions and GKE03, EKE03	<b>21.00</b>
<b>CYL-6KDQ</b>	6 pin, 1.125" mortise cylinder, keyed different, dull chrome, incl. straight and clover cam			<b>32.00</b>
<b>CYL-6KAQ</b>	6 pin, 1.125" mortise cylinder, keyed alike, dull chrome, incl. straight and clover cam			<b>32.00</b>
<b>RIM-CYL-KA</b>	6-pin Rim Cylinder, Keyed Alike, Specially for 03 Function Specifically For Trim EK03, GK03 and SP03			<b>34.00</b>



EKE Eclipse



GKE Galaxy

### ELECTRIC TRIM OPTIONS FOR SDC 6000 SERIES

Add to List

#### FEATURES

- Failsecure, field reversible to failsafe
- 4 ft cable and connectors
- 600/300 mA @ 12/24VDC

<b>EKE03</b> Eclipse style electric trim less mortise cylinder, Stainless Steel Finish	<b>699.00</b>
<b>GKE03</b> Galaxy style electric trim less mortise cylinder, Stainless Steel Finish	<b>699.00</b>

#### Electric Trim Options

<b>LS</b> Locked/unlocked status, SPDT 3 Amp contact	<b>83.00</b>
--	--------------

## Optinal Door Strikes

### LIST



**ST2DF 50.00**

Optional for pairs of doors with rim mount device.

**Projection:** 1-15/16" (49mm)



**ST1MP**  
For 6100P



**ST1MF**  
For 6100F

**Projection:** 7/8" (22.5mm)

**71.00**

Optional for mullion application

## Removable Mullion

### LIST



**KR90F 673.00**

**Standard Key Removable Mullion**

For Panic Exit and Fire Exit Rim Mount Devices

**Length:** 8ft

**Material:** 2" 11 Gauge Steel Tube


**Finish:** Primer gray

Price List Effective February 1, 2017

**SDC SECURITY DOOR CONTROLS**  
801 Avenida Acaso • Camarillo, CA 93012  
Email: Service@sdsecurity.com • www.sdsecurity.com



Exit Devices

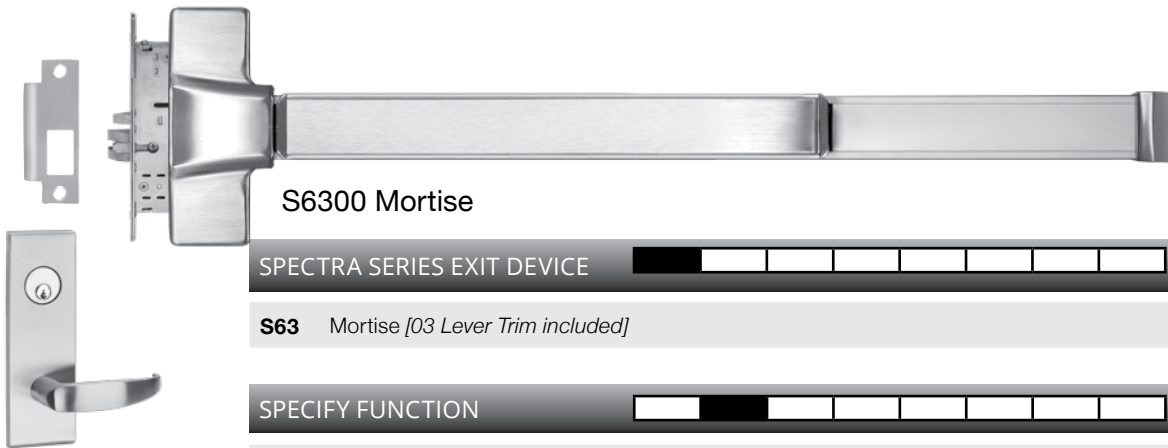

S6300 Mortise

SPECTRA SERIES EXIT DEVICE         LIST

**S63** Mortise *[03 Lever Trim included]* **1139.00**

SPECIFY FUNCTION

- 01** Exit Only, No Trim **N/C**
- 02** Dummy Pull or Lever (opens when dogged) **N/C**
- 03** Entrance by trim when latch is released by key **N/C**
- 08** Lever with key locks/unlocks lever **N/C**
- 14** Lever trim always active **N/C**

SPECIFY PANIC OR FIRE RATED         Add to List

- P** Panic exit device **N/C**  
Mechanical Dogging STD; See part # CD for optional key cylinder dogging
- F** Fire exit device **114.00**  
Mechanical dogging not available

SPECIFY HAND

**RR** Right hand reverse bevel, RHRB **LR** Left hand reverse bevel, LHRB **N/C**

SPECIFY FINISH          Add to List

**U** 630 Dull Stainless Steel **N/C**

SPECIFY LENGTH          Add to List

**36** For 36" Door **N/C**      **42** For 42" Door **21.00**      **48** For 48" Door **42.00**

SPECIFY TRIM

**EE** Eclipse Escutcheon **GE** Galaxy Escutcheon **N/C**

TRIM CYLINDER OPTIONS         Add to List

- CD** Keyed dogging (Specify key cylinder separately) (not available with (F) fire exit device) **21.00**
- CYL-6KDQ** 6 pin, 1.125" mortise cylinder, keyed different, dull chrome **32.00**
- CYL-6KAQ** 6 pin, 1.125" mortise cylinder, keyed alike, dull chrome **32.00**

SPECIFY OPTIONS          Add to List

**R** Request-To-Exit Output, SPDT **83.00**      **L** Latch Status Output, SPDT **83.00**