




SECURITY DOOR CONTROLS

801 Avenida Acaso, Camarillo, Ca. 93012 • (805) 494-0622 • Fax: (805) 494-8861
www.sdcsecurity.com • E-mail: service@sdsecurity.com

HITOWER ZR, R7500 SERIES TEMPLATE - 2" FRAMES

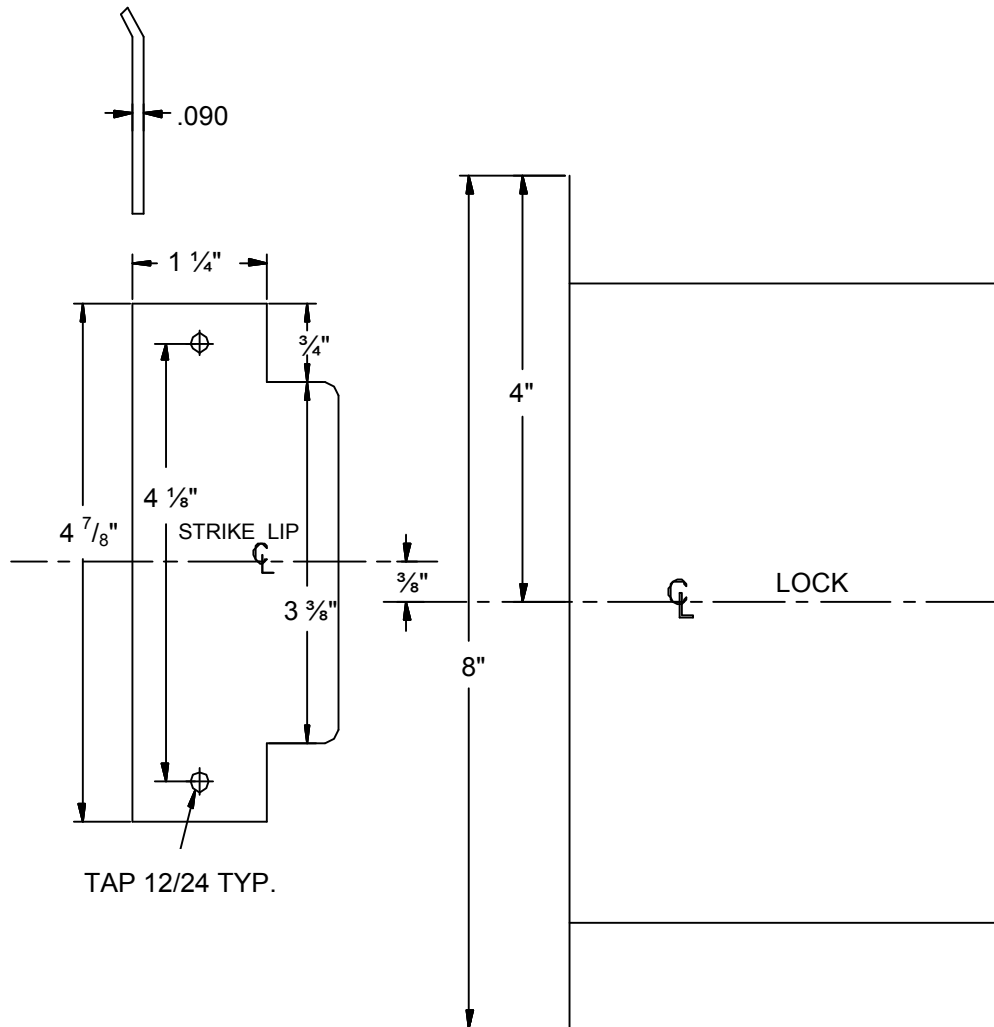

NOT TO SCALE


NOTE:
CONCRETE/
MASONRY
DETAIL
SHOWN

FOR STRIKE
RELATION TO
LOCK SEE
LEFT SIDE OF
TEMPLATE

NOTE:
MINIMUM FRAME
FACE 2"

RIGHT HAND
SHOWN,
LEFT HAND
OPPOSITE

DO NOT INSTALL PLASTER BOX

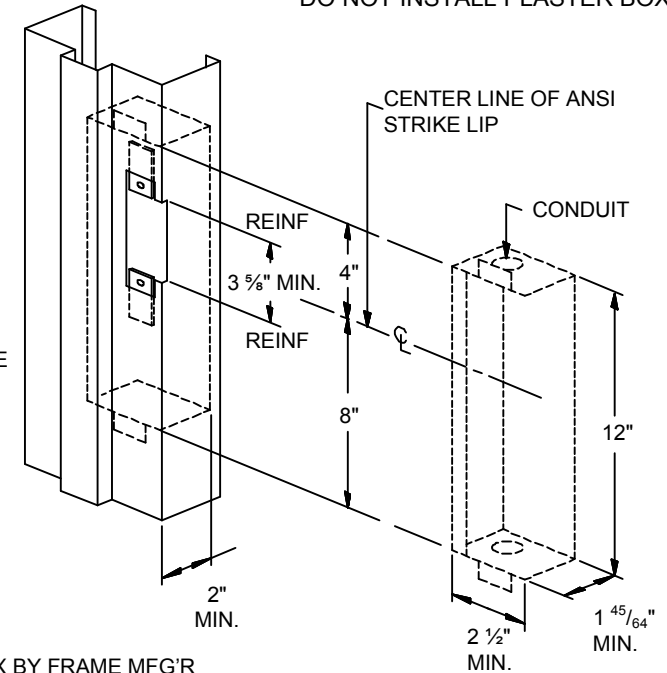

ELECTRICAL BOX BY FRAME MFG'R

IMPORTANT


Details show space requirements for electric controller box. Allowances for different wall construction materials must be taken into consideration. Install conduit connectors in top of box before welding to frame.

NOTE:

THE 3-5/8" CLEARANCE BETWEEN THE STRIKE REINFORCEMENT TABS IS CRITICAL. *MAXIMUM THICKNESS OF TABS .125

UL LISTED BOX AS SHOWN AVAILABLE FROM SECURITY DOOR CONTROLS PART #5000EB-2

HOLES REQUIRED FUNCTIONS

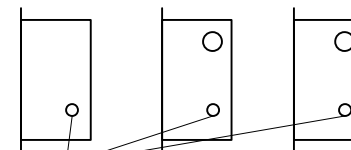

KNOB B/SIDES	CYL OUTSIDE ONLY	CYL BOTH SIDES
7510 7540	7520 7550	7530

Door Prep. Only

Identify the lock and manufacturer by letter prefix. Review proper manufactures template requirements for **door prep only**. See details far left and above for frame prep.

SOURCE #	MODEL #
ZR SDC R Schlage	7500 L9080