

# shipQUICK



Revised December 2010

### Security Dealers, Integrators, Installers and Distributors

150 SDC products are available for shipment the same day or by the next business day. Keep your copy of the shipQUICK inventory readily available so you know firsthand which products your SDC distributor can expedite for you. Check the SDC website periodically to download revised inventory lists, product datasheets and more.

### Reduce Time-In-Transit and Shipping Costs

To reduce time in-transit & shipping costs, the shipQUICK inventory is available from two regional warehouses.



shipQUICK Inventory Warehouses:

Camarillo, CA • Baltimore, MD



### ELECTRIC LOCKSETS All lock models below are locked outside only

WT. IN LBS.

Model	Description	WT. IN LBS.
7000-DF	Door Core Drill Fixture with 3/8" Drill Bit (1/4" Drill Bit Optional)	14.0
7000-IDF	Intertek Perfect Raceway Program Compliant Door Core Drill Fixture	14.0
7000-CC	Canvas Carrying Case	2.0
PTH-10Q	10 Wire Power Transfer Hinge, 4.5"x 4.5", UL Listed	1.2
PTH-4Q	4 Wire Power Transfer Hinge, 5ft cable, 1-pair 1Amp, 1-pair 250mA, 4.5"x 4.5", UL Listed	1.0
PTH-2-4Q	Power Transfer Hinge, 1-pair 8Amp inrush, 2-pair 100mA, 4.5"x 4.5", UL Listed	1.0
Z7250GQ	Electra Pro™ Cylindrical Lockset, Failsafe, REX output, 12/24VDC, Galaxy Lever, 626	6.0
Z7250EQ	Electra Pro™ Cylindrical Lockset, Failsafe, REX output, 12/24VDC, Eclipse Lever, 626	6.0
Z7252GQ	Electra Pro™ Cylindrical Lockset, <b>Failsecure</b> , REX output, 12/24VDC, Galaxy Lever, 626	6.0
Z7252EQ	Electra Pro™ Cylindrical Lockset, <b>Failsecure</b> , REX output, 12/24VDC, Eclipse Lever, 626	6.0
Z7850RUG	SELECTRIC® PRO Mortise Lock, Failsafe, RH, 12/24VDC, Galaxy Trim, 630	7.0
Z7850LUG	SELECTRIC® PRO Mortise Lock, Failsafe, LH, 12/24VDC, Galaxy Trim, 630	7.0
Z7850LU1	SELECTRIC® PRO Mortise Lock, Failsafe, LH, 12/24VDC, Galaxy Trim, Key Cylinder, 630	7.5
Z7850RU	SELECTRIC® PRO Mortise Lock, Failsafe, RH, 12/24VDC, 630 ( <b>less trim</b> )	3.5
Z7850LQG	SELECTRIC® PRO Mortise Lock, Failsafe, LH, 12/24VDC, Galaxy Trim, 626	7.0
Z7850RQG	SELECTRIC® PRO Mortise Lock, Failsafe, RH, 12/24VDC, Galaxy Trim, 626	7.0
Z7850RRUG	SELECTRIC® PRO Mortise Lock, Failsafe, RHR, 12/24VDC, Galaxy Trim, 630	7.0
Z7850LRUG	SELECTRIC® PRO Mortise Lock, Failsafe, LHR, 12/24VDC, Galaxy Trim, 630	7.0
Z7852RUG	SELECTRIC® PRO Mortise Lock, <b>Failsecure</b> , RH, 12/24VDC, Galaxy Trim, 630	7.0
Z7852LUG	SELECTRIC® PRO Mortise Lock, <b>Failsecure</b> , LH, 12/24VDC, Galaxy Trim, 630	7.0
Z7852LU	SELECTRIC® PRO Mortise Lock, <b>Failsecure</b> , LH, 12/24VDC, 630 ( <b>less trim</b> )	7.0
Z7852RRUG	SELECTRIC® PRO Mortise Lock, <b>Failsecure</b> , RHR, 12/24VDC, Galaxy Trim, 630	7.0
Z7852LRUG	SELECTRIC® PRO Mortise Lock, <b>Failsecure</b> , LHR, 12/24VDC, Galaxy Trim, 630	7.0
Z7850RUE	SELECTRIC® PRO Mortise Lock, Failsafe, RH, 12/24VDC, Eclipse Trim, 630	7.0
Z7850LUE	SELECTRIC® PRO Mortise Lock, Failsafe, LH, 12/24VDC, Eclipse Trim, 630	7.0
Z7850RRUE	SELECTRIC® PRO Mortise Lock, Failsafe, RHR, 12/24VDC, Eclipse Trim, 630	7.0
Z7850LRUE	SELECTRIC® PRO Mortise Lock, Failsafe, LHR, 12/24VDC, Eclipse Trim, 630	7.0
Z7852RUE	SELECTRIC® PRO Mortise Lock, <b>Failsecure</b> , RH, 12/24VDC, Eclipse Trim, 630	7.0
Z7852LUE	SELECTRIC® PRO Mortise Lock, <b>Failsecure</b> , LH, 12/24VDC, Eclipse Trim, 630	7.0
Z7852RRUE	SELECTRIC® PRO Mortise Lock, <b>Failsecure</b> , RHR, 12/24VDC, Eclipse Trim, 630	7.0
Z7852LRUE	SELECTRIC® PRO Mortise Lock, <b>Failsecure</b> , LHR, 12/24VDC, Eclipse Trim, 630	7.0
Z7850RUN	SELECTRIC® PRO Mortise Lock, Failsafe, RH, 12/24VDC, Nova Trim, 630	7.0
Z7850LUN	SELECTRIC® PRO Mortise Lock, Failsafe, LH, 12/24VDC, Nova Trim, 630	7.0
Z7850RRUN	SELECTRIC® PRO Mortise Lock, Failsafe, RHR, 12/24VDC, Nova Trim, 630	7.0
Z7850LRUN	SELECTRIC® PRO Mortise Lock, Failsafe, LHR, 12/24VDC, Nova Trim, 630	7.0
Z7852RUN	SELECTRIC® PRO Mortise Lock, <b>Failsecure</b> , RH, 12/24VDC, Nova Trim, 630	7.0
Z7852LUN	SELECTRIC® PRO Mortise Lock, <b>Failsecure</b> , LH, 12/24VDC, Nova Trim, 630	7.0
Z7852RRUN	SELECTRIC® PRO Mortise Lock, <b>Failsecure</b> , LHR, 12/24VDC, Nova Trim, 630	7.0
Z7852LRUN	SELECTRIC® PRO Mortise Lock, <b>Failsecure</b> , LHR, 12/24VDC, Nova Trim, 630	7.0

Electra Pro™



SELECTRIC®




(G) Galaxy



(E) Eclipse



(N) Nova



7000-DF

Call your local ADI Sales Representative for more information

**ELECTRIC DEADBOLTS**

**WT. IN LBS.**

110IV	Direct Throw Bolt Lock, 12/24VDC, 628 Aluminum	2.0
160IV	Direct Throw Bolt Lock x ARS 12/24VDC, 628 Aluminum	2.0
180ALIV	Surface Mount Bolt Lock Less ARS, 12/24VDC, Left handed, 628 Aluminum	3.0
180ARIV	Surface Mount Bolt Lock with ARS, 12/24VDC, Right handed, 628 Aluminum	3.0
290	Micro Cabinet Lock, 12/24VDC	1.0
210HV	2-3/4" x 1-1/4" Face plate, less auto relock switch, failsecure, 628 Aluminum	1.0
FS23MIV	Spacesaver® Narrow Bolt Lock x ARS, 12/24VDC, 628 Aluminum, CSFM	1.5
PD2090ALCU	PanicLok LH 24VDC for Dor-O-Matic & Kawneer Exit Device, 630 Stainless Steel	2.0
PD2090ARCU	PanicLok RH 24VDC for Dor-O-Matic & Kawneer Exit Device, 630 Stainless Steel	2.0
100-2	Solenoid for 110, 160, 1090A, 1090ADL, FS23M, 180 Locks, 500 mA @ 24VAC	1.0
100-4	Solenoid for 110, 160, 1090A, FS23M Locks, 900/450 mA @ 12/24VDC	1.0
1190AU	Heavy Duty Spacesaver Mortise Bolt Lock, failsafe, 0.7 Amp @ 24VDC	2.0



**ELECTRIC STRIKES**

**WT. IN LBS.**

15-4S12U	ANSI 4-7/8" with radius, for 5/8" latch or 3/4" latch with 1/8" door gap 12VDC, 630	2.0
15-4S24U	ANSI 4-7/8" with radius, for 5/8" latch or 3/4" latch with 1/8" door gap 24VDC, 630	2.0
25-4U	ANSI 4-7/8" with <b>latch status</b> , for 5/8" latch, 12/24VDC, 630	2.0
45-4SU	ANSI 4-7/8" with <b>latch &amp; strike deadlock status</b> , 12/24VDC, 630	2.0
45-A	<b>Universal Strike (1)</b> ANSI 4-7/8" plate, <b>(1)</b> 4-7/8" radius plate, <b>(1)</b> 7-15/16" radius plate, 630 , with latch & strike deadlock status, 12/24VDC, 630	2.0
55-ABC	<b>Universal Strike</b> , 5 ANSI 4-7/8" faceplates, for <b>55-A/B/C applications below</b> , 12/24VDC, 630	
55-AU	ANSI 4-7/8", for cylindrical lock with 5/8" latch, 12/24VDC, 630	3.0
55-BU	ANSI 4-7/8", for mortise lock with 3/4" latch & deadlatch <b>below</b> latch, 12/24VDC, 630	3.0
55-CU	ANSI 4-7/8", for mortise lock with 3/4" latch & deadlatch <b>above</b> latch, 12/24VDC, 630	3.0
55-DU	ANSI 4-7/8", for mortise lock with 3/4" latch, 1" deadbolt & deadlatch <b>below</b> latch, 12/24VDC, 630	3.0
55-EU	ANSI 4-7/8", for mortise lock with 3/4" latch, 1" deadbolt, <b>without</b> deadlatch, 12/24VDC, 630	3.0
55-FU	ANSI 4-7/8", for mortise lock with 3/4" latch, 1" deadbolt & deadlatch <b>above</b> latch, 12/24VDC, 630	3.0



**ELECTROMAGNETIC LOCK**

**WT. IN LBS.**

1511V	EMLock® Single 1650lb, 12/24VDC, 628 Aluminum	11.0
1511VD	EMLock® Single 1650lb, 12/24VDC, 628 Aluminum, <b>DPS Door Status</b>	11.0
1512V	EMLock® Double 1650lb, 12/24VDC, 628 Aluminum	26.5
1561ITCM	Hi/Shear® EMLock® 2000lb, 12/24VDC, ITCM	5.0
1565ITC	Hi/Shear® EMLock® 2700lb, 12/24VDC, ITC	6.5
1571V	EMLock® Single 1200lb, 12/24VDC, 628 Aluminum	11.0
1571VD	EMLock® Single 1200lb, 12/24VDC, 628 Aluminum, <b>DPS Door Status</b>	11.0
1571VDB	EMLock® Single 1200lb, 12/24VDC, 628 Aluminum, <b>DPS, Magnetic Bond Sensor</b>	11.0
1571X	EMLock® Single 1200lb, 12/24VDC, <b>313 Dark Bronze</b>	11.0
1572V	EMLock® Double 1200lb, 12/24VDC, 628 Aluminum	26.5
1572X	EMLock® Double 1200lb, 12/24VDC, <b>313 Dark Bronze</b>	26.5
1575U	Gate EMLock®, 12/24VDC, Stainless Steel Standard Mount	10.0
1576U	Gate EMLock®, 12/24VDC, Stainless Steel Face Mount	10.0
1581V	EMLock® Single 650lb, 12/24VDC, 628 Aluminum	5.0
1581VD	EMLock® Single 650lb, 12/24VDC, 628 Aluminum, <b>DPS Door Status</b>	5.0
1581X	EMLock® Single 650lb, 12/24VDC, <b>313 Dark Bronze</b>	5.0
1582V	EMLock® Double 650lb, 12/24VDC, 628 Aluminum	8.0
1583V	Cabinet EMLock® 300lb 12/24VDC, 628 Aluminum	2.0
HDB1V	Universal Glass Door Kit 628 for 1511, 1571, 1581	3.0
TJ1V	Top Jamb Mounting Kit 628 for Single 1511 and 1571	4.5
TJ2V	Top Jamb Mounting Kit 628 for Double 1512 and 1572	9.0
TJ81V	Top Jamb Mounting Kit 628 for Single 1581	6.0
TJ82V	Top Jamb Mounting Kit 628 for Double 1582	6.0
AB	Angle Brackets, See Datasheet at <a href="http://www.sdcsecurity.com">www.sdcsecurity.com</a>	(consult factory)
FP	Filler Plate, See Datasheet at <a href="http://www.sdcsecurity.com">www.sdcsecurity.com</a>	(consult factory)
EZ-D-10	Door Position Sensor kit for 1510 and 1570 series (field installation)	0.2
EZ-D-80	Door Position Sensor kit for 1580 series (field installation)	0.2



**DELAYED EGRESS**

**WT. IN LBS.**

1581SNDV	Mini Exit Check® single 650lbs. w/tone/LED annunciator fixed 15 sec delay 12/24VDC 628	7.0
1581S-TC3	Cable kit for for 1581S connect two locks through the frame header	1.0
1511SNAKV	Exit Check® Single with voice/tone/digital countdown display, selectable 15 or 30 second delay 12/24VDC, 628 Aluminum	13.2
1511SNAKVD	Exit Check® Single with <b>door status</b> , voice/tone/digital countdown display, selectable 15 or 30 second delay, 12/24VDC, 628 Aluminum	13.2
101-DE	Wall mount controller with keypad control and reset, 200 mA @ 12/24VDC	1.2





### ACCESS CONTROLS

WT. IN LBS.

917U	120 user codes, 1 to 6 digits, 3 LEDs 12/24 VAC/DC, 630 Stainless Steel Finish	2.5
925	480 Code Outdoor PIN Pad, 12/24V AC/DC, Surface Mount	2.5
928	480 Code Indoor PIN Pad, 12/24V AC/DC, Surface Mount	2.5
E4KP	HID compatible Prox Reader with Relay Module	0.5
E5P	HID compatible Prox and PIN Reader, Controller and remote relay module	0.5
E72KAE1B	EntryCheck™ 160 User Digital Stand Alone Lock, Eclipse Lever, Black	11.0
E72KAG1B	EntryCheck™ 160 User Digital Stand Alone Lock, Galaxy Lever, Black	11.0
E72KEE1Q	EntryCheck™ 1500 User Digital Stand Alone Lock, Eclipse Lever, 626 Dull Chrome	11.0
E72KEG1Q	EntryCheck™ 1500 User Digital Stand Alone Lock, Galaxy Lever, 626 Dull Chrome	11.0
IDT	E72 Upload/Download Device/Software	2.0
HID1326-25	HID ProxCard® II, 25 cards	0.2
HID1346-10	ProxKey II, pack of 10 key fobs	0.2

### POWER SUPPLIES

WT. IN LBS.



602RF	1 Amp 12/24VDC Power Supply x Fire Relay x Battery Charger, 11" x 11" Cabinet	8.5
621B	Power supply module, 1Amp, 12/24VDC, Class 2	0.3
621P	Power supply module, 1Amp, 12/24VDC, Class 2 with plug-in Transformer	1.7
621PJ	Power supply module, 1Amp, 12/24VDC, Class 2 with plug-in Transformer <b>and enclosure</b>	4.2
631RF	1.5 Amp 12/24VDC Power Supply x Fire Relay x Battery Charger, 11" x 11" Cabinet	8.8
631RFL	1.5 Amp, class 2 output, Field selectable 12/24VDC, less box	0.5
631RFA	1.5 Amp 12/24VDC Power Supply x Fire Relay x Battery Charger, 14" x 16" Cabinet	20.0
632RF	2 Amp 12/24VDC Power Supply x Fire Relay x Battery Charger, 11" x 11" Cabinet	8.8
632RFL	2 Amp, class 2 output, less box	3.4
634RF	4 Amp 12/24VDC Power Supply x Fire Relay x Battery Charger, 14" x 16" Cabinet	20.3
636RF	6 Amp 12/24VDC Power Supply x Fire Relay x Battery Charger, 14" x 16" Cabinet	25.2
TD	Timer Module 1-120 sec 12/24VDC Output:1 wet 1 dry	0.4
12VR	Provides Dual 12 and 24VDC Outputs for Power Supply, 12V for Reader, 24V for Lock	.03
FB-4	Power Supply Module with 4 Fuse Protected Outputs & Status LED for Power Supplies	0.1
CR-4	Relay Module, 4 SPDT Relays 12/24VDC	0.7
CR-12	Control Relay 12V, 1 Fused SPDT Voltage Output, 1 SPDT Auxiliar Dry Contact, Output 5Amp	0.5
CR-24	Control Relay 24V, 1 Fused SPDT Voltage Output, 1 SPDT Auxiliary Dry Contact Output, 5Amp	0.5
UR2A	Universal Programmable 2 Station Controller	0.8
UR4A	Universal Programmable 4 Station Controller	1.0
RB12V4	12V, 4 Amp Hour Battery	3.5
RB12V4-2	Two Batteries, 12V 4 Ah: 8 Ah @ 12VDC; 4 Ah @ 24VDC	8.0
RB12V7-2	Two Batteries, 12V 7 Ah: 14 Ah @ 12VDC; 7 Ah @ 24VDC	11.0
TR12	Plug-in 12VDC Supply, 2 Regulated Outputs, 780mA Fused x 150mA Non-Fused	1.1
TR24	Plug-in 24VDC, 1 Amp Filtered & Surge Protected Supply	1.5
TJ2440	24VAC, 1.6Amp Transformer, Base mount	1.5
BR64XL	Rectifier with 6" Wire Leads	0.5

### EXIT BARS AND KEY SWITCHES

WT. IN LBS.



10TD	MiniTimer adjustable 1-60 seconds, 12/24V AC/DC SPDT Dry	0.2
412NU	Narrow "PUSH to EXIT" Switch, 1-3/4" Green Illuminated Button, MO SPDT, 10Amp	0.3
422U	2" PUSH to EXIT, Green Illuminated Mom SPDT 10 Amp, 630 Finish	0.4
422UR	2" PUSH to EXIT Red Illuminated Mom SPDT 10 Amp, 630 Finish	0.4
423MU	2" PUSH to EXIT, fixed 30 second timer, 12/24VDC, 2 Amp output	0.4
434UR	1 1/2" Red EXIT Mushroom, Mom DPST 6 Amp, 630 Finish	0.5
460U	Push to Exit, Piezoelectric w/ 40 sec timer, red & green LED, 12/24VDC, 2Amp contact	0.6
452V	Vandal Resistant Steel Push Switch w/ .25" thick aluminum plate 6 Amp @ 30 AC/DC	0.5
702U	Key Switch 1 gang Momentary SPDT 6 Amp, 630 Finish	0.5
701U	Key Switch 1 gang AA SPDT 6 Amp, 630 Finish	0.5
BB1D	Single Gang Black Box, 2.25"W x 3.75"H x 2.75"D	0.2
728L3	Key Switch 1 gang Momentary and AA SPST with LED 4 Amp, 630	0.5
MSB550V	REX Mechanical Switch Bar, 1 SPDT 5 Amp, 628 Aluminum, 36"	6.5
MSB550-2V	REX Mechanical Switch Bar, 2 SPDT 5 Amp, 628 Aluminum, 36"	6.5
MSB550Y	REX Mechanical Switch Bar, 1 SPDT 5 Amp, <b>335 Black</b> , 36"	6.5
MSB550-2Y	REX Mechanical Switch Bar, 2 SPDT 5 Amp, <b>335 Black</b> , 36"	6.5
PSB560V	SURE EXIT® Pressure Sense Bar, 2 SPDT, 628 Aluminum, 36"	6.5
PSB560Y	SURE EXIT® Pressure Sense Bar, 2 SPDT, <b>335 Black</b> , 36"	6.5

**SEE PAGE 4 FOR ACCESSORIES, TOOLS, AND SHIPQUICK DETAILS**



ACCESSORIES AND TOOLS		WT. IN LBS.
7000-DF	Door Core Drill Fixture 3/8" Drill Bit (1/4" Drill Bit Optional)	14.0
7000-IDF	Intertek Perfect Raceway Program Compliant Door Core Drill Fixture	14.0
7000-CC	Canvas Carrying Case	2.0
15-2	Under Desk Mount Push Switch, Momentary, SPDT 10A	0.3
491	Break Glass Door Release, DPDT 10A w/Siren Blue	1.4
491-BB	Blue Surface Mount Back Box for 491	1.1
491-GL4	4 each Replacement Glass for 491	0.3
492	Emergency Pull Station	1.4
MD-31DB	PIR Motion Det <b>Black</b> 12/24V AC/DC 2SPDT, <b>California, IBC, IFC, NFPA Code Compliant</b>	0.4
MD-31DW	PIR Motion Det <b>White</b> 12/24V AC/DC 2SPDT, <b>California, IBC, IFC, NFPA Code Compliant</b>	0.4
PT-2U	Armored Flex Power Loop SS	0.2
PT-3V	Armored Flex Power Loop w/Wire Junction Aluminum	0.6
PT-5	Concealed Power Transfer Device, UL Listed Fire Door Accessory, UL 10C Compliant	0.7
PTH-10Q	10 Wire Power Transfer Hinge, 4.5" x 4.5" 626	1.2
PTH-4Q	4 Wire Power Transfer Hinge, 5ft cable, 1-pair 1Amp, 1-pair 250mA, 4.5" x 4.5", UL Listed	1.0
PTH-4QDPS	4 Wire Power Transfer Hinge w Door Status Contact, 5ft cable, 1-pair 1Amp, 1-pair 250mA, 4.5" x 4.5", UL Listed	1.2
PTH-2-4Q	Power Transfer Hinge, 1-pair 8Amp inrush, 2-pair 100mA, 4.5" x 4.5", UL Listed	1.0
MC-4	Concealed Recesses Magnetic Contact, 3/4" Diameter, SPDT	0.3
14-2	7 Day Programmable Timer for Automatic Lock System Control, Includes Battery Back-up	0.3
514	Exit Device Switch Kit, Dor-O-Matic 990, 1090, 1990, 2090	0.2

### shipQUICK Program Policy


- SDC Distributor (SDC Open Accounts)
- Contact SDC sales department or your local SDC sales representative for participating qualification
- Maximum Quantity allowed, ten(10) per product. Mixed product orders accepted, i.e. 10 ea. 928 Keypads, 10 ea. 1511 EMlock, 10 ea. 602RF Power Supplies
- Qualifying orders will ship by next business day.
- ShipQUICK orders are non-cancelable.
- Availability limited to shipQUICK inventory on hand
- No backorders; all items on multiple product orders must ship from shipQUICK inventory
- Freight paid by customer.
- Warehouse of origin based on availability.
- Standard SDC payment terms apply.

**Security Dealers, Integrators, Installers and Distributors**  
 Keep your copy of the shipQUICK inventory readily available so you know firsthand which products your SDC distributor can expedite for you. Check the SDC website periodically to download revised inventory list, product datasheets and more.

### Estimated UPS Ground Delivery Time-In-Transit

Delivery time-in-transit is based on regional stock availability. Confirm warehouse of origin when placing order to determine UPS Ground time-in-transit. Delivery time-in-transit maps are for reference only and subject to change by UPS.

**Corporate Warehouse** Camarillo, CA 93012

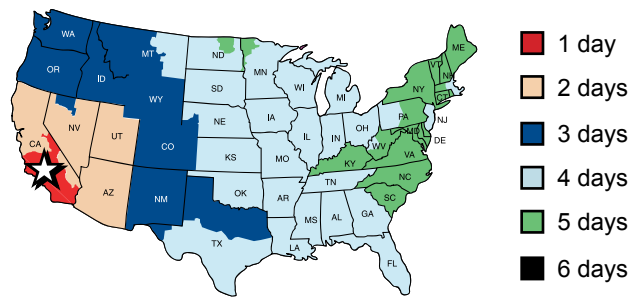

**Regional Warehouse** Baltimore, MD 21030

