



920



920P



920PW


The **920 Series EntryCheck™** stand-alone digital keypad is designed to control access of a single entry point with up to 500 users with a PIN Code and/or HID compatible credentials. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock. Heavy Cast Vandal Resistant Housing. Heavy Cast Metal Blue Backlit Keys.

ELECTRICAL SPECIFICATIONS

| | |
|------------------------------|--|
| Voltage | 12/24 VAC/DC — 5-16 VDC for Wiegand (920PW) |
| Current | 30mA typical, 150mA maximum - 60mA max for Wiegand |
| Outputs (920/920P) | Relay 1 - SPDT 5 Amps @ 30VDC Relay 2 - SPDT 2 Amps @ 30VDC Switch to Common Outputs 3 & 4 - 100mA @ 30VDC |
| Operating Temperature | -4°F to + 140°F (-20°C to + 60°C) |
| Operating Humidity | 5% to 95% non-condensing |
| Housing | 3"W x 5-3/4"H x 1-7/16"D |

| | | |
|--------------|---|---------------|
| 920 | Stand alone digital keypad | 195.00 |
| 920P | Stand alone digital keypad with Prox Reader | 433.00 |
| 920PW | Digital keypad with Prox Reader, Wiegand output | 433.00 |

CARDS, KEY FOBS and TAGS see bottom of page 73

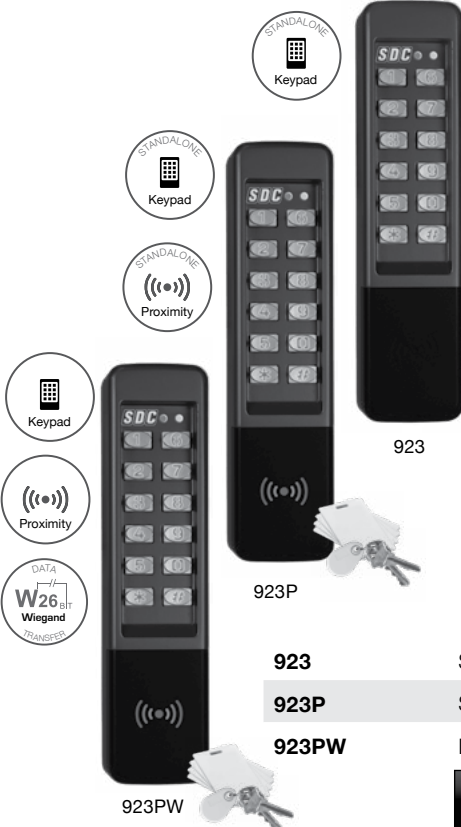

923

923P

923PW

The **923 Series EntryCheck™** narrow stand-alone digital keypad is designed to control access of a single entry point with up to 500 users with a PIN Code and/or HID compatible credentials. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock. Heavy Cast Vandal Resistant Housing. Heavy Cast Metal Blue Backlit Keys.

ELECTRICAL SPECIFICATIONS

| | |
|------------------------------|--|
| Voltage | 12/24 VAC/DC — 5-16 VDC for Wiegand |
| Current | 30mA typical, 150mA maximum - 60mA max for Wiegand |
| Outputs (923/923P) | Relay 1 - SPDT 5 Amps @ 30VDC Relay 2 - SPDT 2 Amps @ 30VDC Switch to Common Outputs 3 & 4 - 100mA @ 30VDC |
| Operating Temperature | -4°F to + 140°F (-20°C to + 60°C) |
| Operating Humidity | 5% to 95% non-condensing |
| Housing | 1-3/4"W x 7-5/16"H x 1-3/8"D |

| | | |
|--------------|--|---------------|
| 923 | Stand alone digital keypad, narrow | 222.00 |
| 923P | Stand alone digital keypad, narrow, with Prox Reader | 527.00 |
| 923PW | Digital keypad, narrow, with Prox Reader, Wiegand output | 527.00 |

CARDS, KEY FOBS and TAGS see bottom of page 73

921P INDOOR/OUTDOOR 2-PIECE EntryCheck™

Distributor Discount Code **JK LIST**



921P

CARDS, KEY FOBS and TAGS see bottom of page

The **921P** stand-alone digital keypad with Prox Reader and Controller (2-piece configuration) are designed to control access of a single entry point with up to 500 users with a PIN Code and/or HID compatible credentials. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock. Heavy Cast Vandal Resistant Housing. Heavy Cast Metal Blue Backlit Keys.

ELECTRICAL SPECIFICATIONS

| | |
|------------------------------|--|
| Voltage | 12/24 VAC/DC |
| Current | 60mA typical, 150mA maximum |
| Outputs | Relay 1 - SPDT 5 Amps @ 30VDC Relay 2 - SPDT 2 Amps @ 30VDC Switch to Common Outputs 3 & 4 - 100mA @ 30VDC |
| Operating Temperature | -4°F to + 140°F (-20°C to + 60°C) |
| Operating Humidity | 5% to 95% non-condensing |
| Housing | 921P: 3"W x 5-3/4"H x 1-7/16"D Controller: 5-5/8"H x 7-11/16"W x 3-3/8"D |

921P Stand alone, surface mount digital keypad, with Prox Reader and Controller **638.00**

925/925P/925PW INDOOR/OUTDOOR Shroud EntryCheck™

Distributor Discount Code **JK LIST**



925



925P




925PW



The **925 Series EntryCheck™** elevates the robustness of the indoor/outdoor 920 keypad with a heavy metal privacy and rain shroud. Perfect for post mount applications.


ELECTRICAL SPECIFICATIONS (KEYPAD)

| | |
|------------------------------|--|
| Voltage | 12/24 VAC/DC - 5-16 VDC for Wiegand (925PW) |
| Current | 30mA typical, 150mA maximum - 60mA max for Wiegand |
| Outputs (925/925P) | Relay 1 - SPDT 5 Amps @ 30VDC Relay 2 - SPDT 2 Amps @ 30VDC Switch to Common Outputs 3 & 4 - 100mA @ 30VDC |
| Operating Temperature | -4°F to + 140°F (-20°C to + 60°C) |
| Operating Humidity | 5% to 95% non-condensing |
| Shroud Dimension | 4-1/16"W x 6-1/8"H x 2-5/8"D |



Post mount by others

925 Stand alone digital keypad with privacy shroud **301.00**
925P Stand alone digital keypad with Prox Reader and privacy shroud **540.00**
925PW Digital keypad with Prox Reader, Wiegand output, and privacy shroud **540.00**

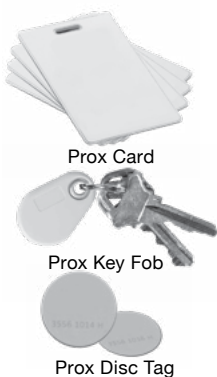

Prox Card

Prox Key Fob

Prox Disc Tag

Cards, Key FOBS and Tags

Distributor Discount Code **MV LIST**

| | | |
|--------------------|---|-----------------|
| HID1326-10 | Proximity Card, HID compatible, 10 cards | 75.00 |
| HID1326-25 | Proximity Card, HID compatible, 25 cards | 177.00 |
| HID1326-100 | Proximity Card, HID compatible, 100 cards | 710.00 |
| HID1346-10 | Proximity Key Fob, HID compatible, 10 key fobs | 145.00 |
| HID1346-100 | Proximity Key Fob, HID compatible, 100 key fobs | 1,419.00 |
| PTAG-10 | Proximity Disc Tag, HID compatible, 10 tags | 81.00 |
| PTAG-25 | Proximity Disc Tag, HID compatible, 25 tags | 193.00 |

Digital Readers & Keypads