

EntryCheck™ 925 Series

Digital Keypads



The SDC EntryCheck™ 925 Series outdoor stand-alone digital keypads with Privacy Shroud are designed to control access of a single entry point for facilities with up to 500 users. Each user is assigned a personal identification number (PIN). Keypad entry of a valid one to six digit code activates one or both of the output relays which releases an electric door lock.

The SDC EntryCheck™ 925P adds HID proximity reader capability to the keypad. The 925PW is designed to interface with most access control systems and provides standard 26-bit Wiegand output. Perfect for Post-mount applications.

FEATURES

- Digital Keypad with or without Wiegand Output for Universal Compatibility
- Weather & Vandal Resistant Housing with Tactile Metal Keys
- HID-Compatible Proximity Reader (925P and 925PW only)
- 12-Key Illuminated, 3" x 4" Keypad
- Surface or Single-Gang Mount
- Built-In Tamper Switch
- Programmable Site Code (925PW)
- Dual LED Status Indicators
- Adjustable Audible Annunciation
- Configurable Illumination: On, Off, Timed

PROX ONLY:

- 3 User Modes:
- PIN or Card
 - Card Only
 - Card and PIN
(HID-Compatible: 125kHz-RFID)


MODELS	
925	Indoor/Outdoor Keypad with Privacy Shroud
925P	Indoor/Outdoor Keypad with Privacy Shroud and Prox Reader
925PW	Indoor/Outdoor Keypad with Privacy Shroud and Prox Reader, Wiegand Output 



PROGRAMMING OPTIONS

The 925 EntryCheck™ series includes a Door Sense/Inhibit Input feature. When programmed for “Door Sense”, a door position switch wired into the input and detects a “forced entry” or “door ajar” condition. When programmed for “Inhibit Input”, a maintained switch or automatic timer wired into the input will disable the activa-

tion of the main relay. The EntryCheck™ also has a request-to-exit input for connection to an exit switch and/or fire access key switch for fire/emergency access. When access is granted, the shunt option is activated shunting alarm contacts on the door or gate. This prevents triggering of an alarm during authorized access.

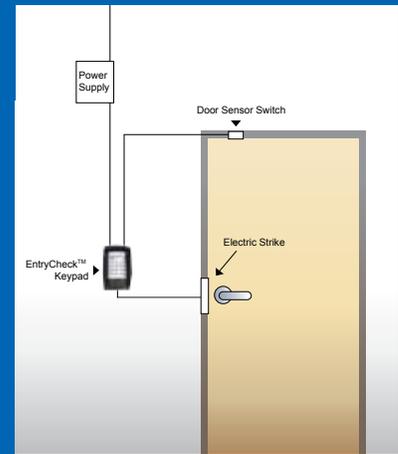

925 & 925P SPECIFICATIONS

Voltage	12/24 VAC/DC
Current	30mA typical, 150mA maximum
Outputs	Relay 1 - SPDT 5 Amps @ 30VDC Relay 2 - SPDT 2 Amps @ 30VDC Switch to Common Outputs 3 & 4 - 100mA @ 30VDC
Temperature	-4°F to +140°F (-20°C to +60°C)
Humidity	5% to 95% non-condensing
Finish	Powder Coat Painted Cast Metal
Weight	2.54 lbs



925PW SPECIFICATIONS

Keypad Housing	Powder Coat Painted Cast Metal
Voltage	5-16VDC
Current	30mA Typical, 60mA Max.
Reader Output	26-bit Wiegand
Reader Frequency	125kHz
Keypad Output	26-bit Wiegand or 4-bit Word
Wiring	6" Pigtail
Temperature	-22°F to +149°F
Humidity	5% to 95% Non-Condensing
Finish	Powder Coat Painted Cast Metal
Weight	2.54 lbs



ACCESSORIES

PROX CARDS AND KEY FOBs



HID1326-25 Proximity Card , 25 Cards

HID1326-100 Proximity Card, 100 Cards



HID1346-10 Proximity Key Fob, 10 Key Fobs

HID1346-100 Proximity Key Fob, 100 Key Fobs

PTAG-10 Proximity Disc Tag, 10 Tags

PTAG-25 Proximity Disc Tag, 25 Tags

