



INSTALLATION INSTRUCTIONS

LR100YDK-EM


YALE ELECTRIC LATCH RETRACTION DEVICE KIT

MODELS: 7100, 7100-2, 7110, 7120, 7200 & 7210

Retrofit Installation Note: 42" or 48" exit devices that have been modified to fit a 36" or smaller opening, may not have the required space to fit the standard E. L. R. assembly. Always verify the distance from the end of the touchpad to the end rail, and if necessary, consult with the factory for appropriate selection.

ELECTRICAL DATA


24VDC +/- 10%
1.5A Inrush / 200mA holding
RED (+) BLK (-)
PATENT #8,851,530

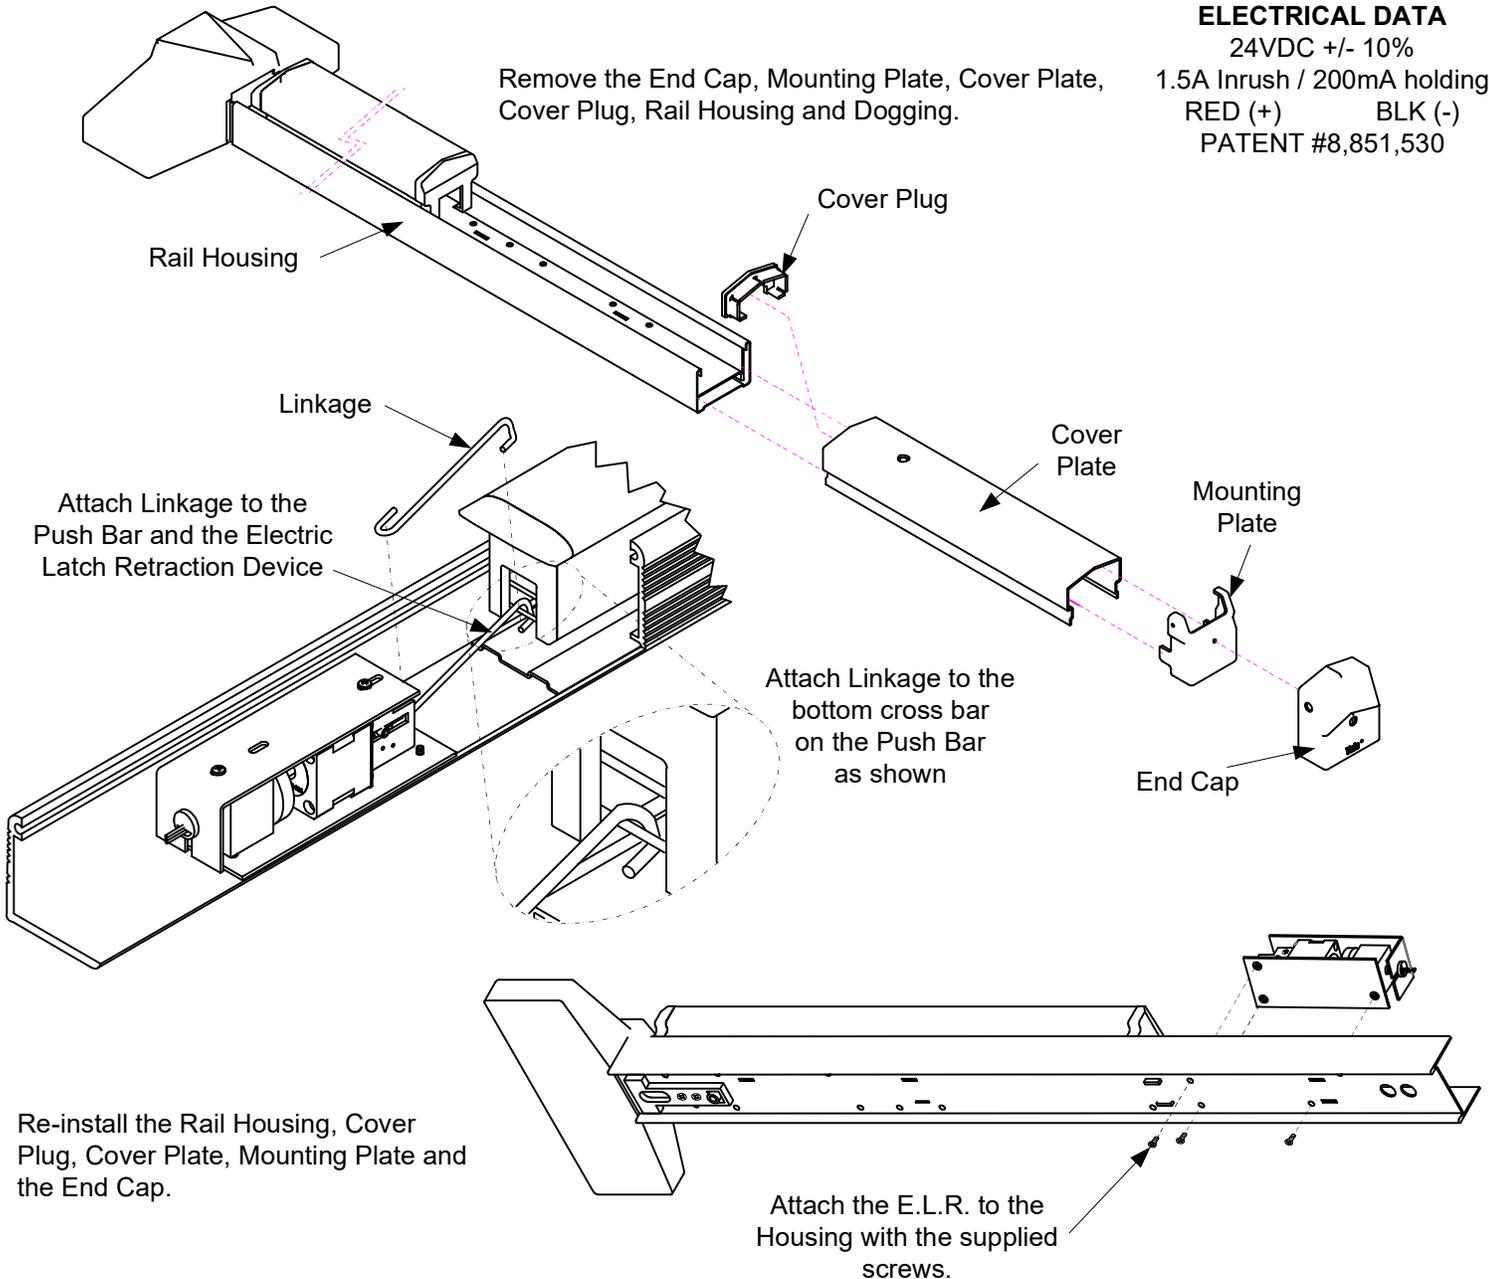

NOTE Retro-Fitting Vertical Rod Devices:

Before retro-fitting an electric latch assembly into a vertical device, the following must be done to ensure proper alignment. Disconnect the vertical rods from the device head. Once the ELR is properly installed energize it so that the push pad is dogged down, by doing so it will allow for proper alignment for the vertical rods. Finally reconnect the vertical rods to the device and make the proper adjustments.

Any suggestions or comments to this instruction or product are welcome. Please contact us through our website or email engineer@sdsecurity.com

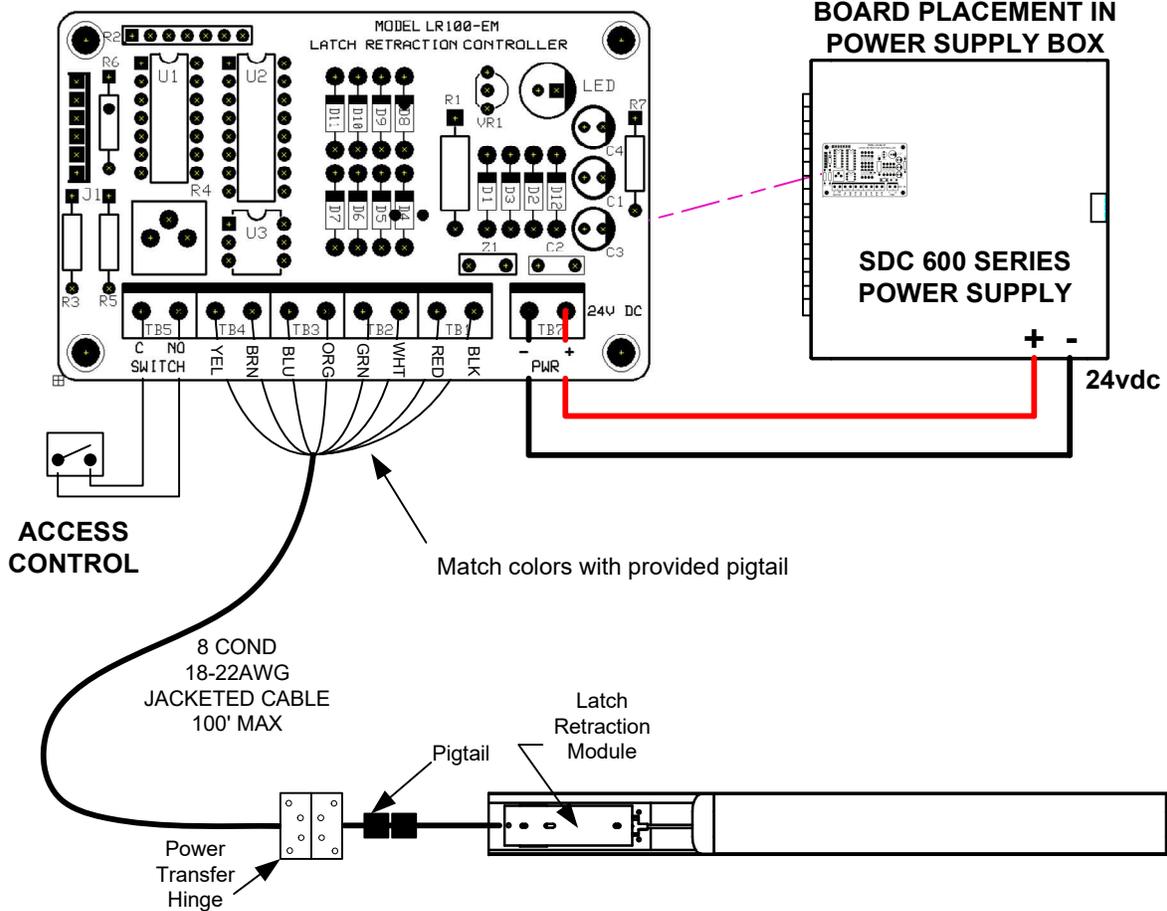

Wire colors from provided Pigtail must connect to the same colors marked on PCB. If the Jacketed Cable does not have the same colors as the Pigtail, use the following chart to mark the color connections from Pigtail to Jacketed Cable to PCB.

| <u>PIGTAIL</u> | <u>JACKETED CABLE</u> | <u>PCB</u> |
|----------------|-----------------------|------------|
| BLACK | → | BLACK |
| RED | → | RED |
| WHITE | → | WHITE |
| GREEN | → | GREEN |
| ORANGE | → | ORANGE |
| BLUE | → | BLUE |
| BROWN | → | BROWN |
| YELLOW | → | YELLOW |