


## **UL 294**

Access Control System Units





## **FEATURES**

- Controls one door directly, with multi-door expansion capabilities
- Password protected built-in web server or FREE downloadable 'Grid' software
- Two Ethernet Ports allow for interfacing with additional IP devices like cameras additional door controllers, etc.
- · Entry & exit reader capability
- Supports industry standard proximity, smart card, and multi-technology readers (Wiegand output)
- Compliant with PoE+ standard
- Internet Explorer, Firefox and Google Chrome browser support

- Manage up to 15,000 users with free software or up to 1,000 via web browser
- · Batch card enrollment
- 250 User groups/Time Zones/Door Groups
- Audit Trail Up to 5,000 events may be exported as a .csv file from web server, unlimited events from PC software interface
- · Anti-tailgating
- Door Status Monitoring Input
- · Request-to-Exit (REX) Input
- Lock Relay Output

Voltage	12 VDC Input	
Current Consumption 250mA (max)		
Operating Temperature	14°F – 122°F (Indoor use only)	
Dimensions	5.375" x 3.5" x 0.875" board only 9.25" x 6.5" x 2.1875" w/ ABS plastic enclosure	
Weight	1lb	
Relay Output Type	Form C (SPDT) x 2	
IP Pro Splitter		
Input Voltage	44 - 57 VDC	
Input Power	30W max	
Output Power	24W max	
Output Current	2A @ 12V	
Relay Output Type	y Output Type Form C (SPDT) x 2	
Relay Contact Rating	Main (Lock) – 5A @ 30VDC Auxiliary – 1A @ 30VDC	

Connections	Digital Inputs: 4 dry contact inputs Ethernet: RJ45
	RS-485 Terminal Bus
	Reader Power – 12VDC
	Reader Data – Wiegand (26bit to 37bit)
	Reader LED Control – Red & Green
	Two Solid State outputs (100mA max)
IP Pro Injector	
PoE+ Output Pin Assignment and Polarity	4/5 (+), 7/8 (–)
Output Power Voltage	55VDC
User Port Power	30Watts (Guaranteed)
Input Power	0.8A @ 100-240VAC

The IP Pro Line of IP-based Access Controllers allows expansion from one Standalone door up to a 100-door "Grid." The Choice is yours! It's like having a local area network for your doors without all the headaches of an enterprise system.



IP Pro Controller board

IP Pro™ Coi	nponents	LIST
IPDCE	IP Pro Controller, board plus enclosure	924.00
IPI-30	IP Pro Injector, 30W PoE+	275.00
IPS-12	IP Pro Splitter, 12VDC PoE+	242.00



IP Pro Door Station Expansion board

IP Pro™ Doo	r Station	LIST	
IPDSE	IP Pro Door Station Expansion, board plus enclosure		699.00



IP Pro Controller enclosure





IP Pro Injector IP Pro Splitter 602RFx12VRxIPDS

 IP Pro™ Kit
 LIST

 IPPRO-SKE
 IP Pro Starter Kit, including Controller board, Splitter, Injector plus Controller enclosure
 1,416.00

 602RFx12VRxIPDC
 1 Amp, class 2 output power, 12/24 VDC dual output, IPDC Controller board, 12" W x 12" H x 3.75" D box
 1,210.00

 602RFx12VRxIPDS
 1 Amp, class 2 output power, 12/24 VDC dual output, IPDS Door Station board, 12" W x 12" H x 3.75" D box
 1,037.00



602RFx12VRxIPDC shown with optional batteries

## Install - Expand - Control





- Embedded software
- Browser Accessible
- 1 to 32 doors



- FREE Access Control Software
- Single PC Accessible
- 1 to 100 doors






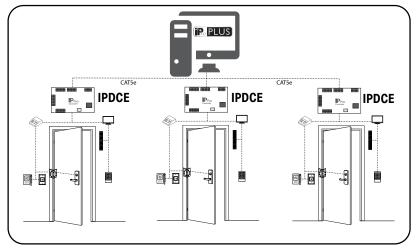



## PLUS features include:

- Intuitive & easy to use software; similar look & feel to the IP Pro™ web browser interface
- Free, single PC software for up to 100 doors
- Configure & manage all your IP ProTM controllers from a single interface - No enterprise headaches
- Wizard & quick start buttons for common tasks
- Automated management reporting
- E-mail alert notifications
- Utilizes the scalability of Microsoft SQL server
- Save more energy the more doors you add

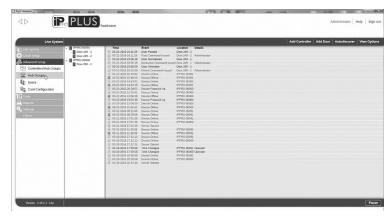



PLUS Hardware is used by the installer to set up controllers, doors and user profiles

- Enable & edit IPPro controllers
- Enable & edit door settings
- Create event filters
- Enable e-mail notifications

PLUS Manage is used by system administrators to facilitate database changes required on a day-to-day basis, and offers various reporting tools

- Create, view, & edit users
- Add access & holiday schedules
- Generate user & event reports

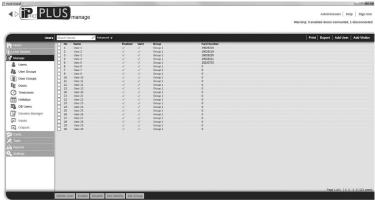

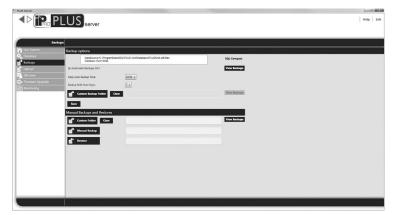

PLUS Server is used by system administrators to perform specialized tasks, such as database backups, firmware updates, importing/exporting users

- Perform manual or schedule automatic backups
- Import/Export Users
- Perform IPPro firmware updates









IPRW500

Wiegand Reade	•	LIST
918W	Indoor digital keypad, Wiegand output	174.00
920PW	Digital keypad with Prox Reader, Wiegand output	433.00
923PW	Digital keypad, narrow, with Prox Reader, Wiegand output	527.00





Cards, Key	FOBS and Tags	Distributor Discount Code MV LIST
HID1326-10	Proximity Card, HID compatible, 10 cards	75.00
HID1326-25	Proximity Card, HID compatible, 25 cards	177.00
HID1326-100	Proximity Card, HID compatible, 100 cards	710.00
HID1346-10	Proximity Key Fob, HID compatible, 10 key fobs	145.00
HID1346-100	Proximity Key Fob, HID compatible, 100 key fobs	1,419.00
PTAG-10	Proximity Disc Tag, HID compadible, 10 tags	81.00
PTAG-25	Proximity Disc Tag, HID compadible, 25 tags	193.00