

S6300-DES Series

Slave Delayed Egress Mortise Exit Devices

SDC's S6300-DES series slave operating exit devices secure the door in a delayed egress system.


Depressing the push pad activates the trigger input of a 101-DE series delayed egress controller, initiating the 15 or 30 second unlock cycle.

Slave operating delayed egress exit device models are available for both panic and fire-rated applications.

Slave operating exit devices do not function on their own. S6300-DES series devices must be ordered with a 101-DE series delayed egress controller.

- · Panic and fire rated devices
- ExitCheck® slave operation
- · Push pad activation trigger
- Low power consumption, energy saver
- Voltage and current spike protection

ORDERING GUIDE

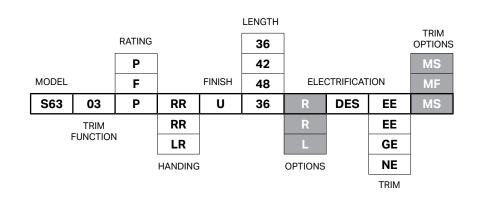

NOT REQUIRED

EXAMPLES

| S6303PRRU36DESEE | Mortise, Nightlatch, Panic, RHRB, 630, 36", Delayed Egress Slave | 2,035.00 |
|------------------|--|----------|
| S6303FRRU36DESEE | Mortise, Nightlatch, Fire, RHRB, 630, 36", Delayed Egress Slave | 2,175.00 |
| S6303PRRU48DESEE | Mortise, Nightlatch, Panic, RHRB, 630, 48", Delayed Egress Slave | 2,143.00 |
| S6303FRRU48DESEE | Mortise, Nightlatch, Fire, RHRB, 630, 48", Delayed Egress Slave | 2,283.00 |
| S6303PRRU42DESEE | Mortise, Nightlatch, Panic, RHRB, 630, 42", Delayed Egress Slave | 2,089.00 |

SDC LIT-PL23_020325 | **55**

^{*} Key cylinders not included, order separately. See related products.





Eclipse Trim



Galaxy Trim



Nova Trim



Mortise Key Cylinder

CONFIGURATION S6300-DES 1 of 1

| | 20300-DE2 | CONFIGURATION | 1 01 1 |
|-----------------|---------------------|--------------------|-------------|
| MODEL | | ●00000000 | LIST\$ |
| S63 | Mortise | | 1,129.00 |
| TRIM FUNCTION | | 00000000 | ADD TO LIST |
| 03 | Key Retracts Latch | nbolt (Nightlatch) | N/C |
| RATING | | 00000000 | ADD TO LIST |
| P | Panic Device 🗞 stor | odard | N/C |
| F | Fire-Rated Device | | 140.00 |
| HANDING | | 000000000 | ADD TO LIST |
| RR | Right Hand Revers | se Bevel (RHRB) | N/C |
| LR | Left Hand Reverse | Bevel (LHRB) | N/C |
| FINISH | | 000000000 | ADD TO LIST |
| U | 630 Dull Stainless | S Standard | N/C |
| LENGTH | | 000000000 | ADD TO LIST |
| 36 | 36" Door Opening | € Standard | N/C |
| 42 | 42" Door Opening | | 54.00 |
| 48 | 48" Door Opening | l | 108.00 |
| OPTIONS | | 0000000000 | ADD TO LIST |
| R | Request-To-Exit (F | REX) | 101.00 |
| L | Latch Status (LS) | | 101.00 |
| ELECTRIFICATION | N | 0000000000 | ADD TO LIST |
| DES | Delayed Egress SI | ave | 613.00 |
| TRIM* | | 000000000 | ADD TO LIST |
| EE | Eclipse Escutched | on | 293.00 |
| GE | Galaxy Escutcheo | n | 293.00 |

^{*} Key cylinder not included, order separately.

Nova Escutcheon

NE

| TRIM OPTIONS | 00000000 | ADD TO LIST |
|--------------|--|-------------|
| MS | Electrified Case, Failsecure Outside Lever | 252.00 |
| MF | Electrified Case, Failsafe Outside Lever | 252.00 |

RELATED PRODUCTS

When you order any SDC products in this section, there are a number of related or complementary products that have proven to work well with your selection.

| CYL-6KDQ | Mortise Cylinder, 6-Pin, 11/8" Length, Keyed Different | 57.00 |
|----------|--|-------|
| CYL-6KAQ | Mortise Cylinder 6-Pin, 11/8" Length, Keyed Alike | 57.00 |
| ST58P | Retrofit Strike, %" Centerline Offset | 21.00 |
| ST58F | Retrofit Strike, %" Centerline Offset, Fire-Rated | 21.00 |

293.00