

The Exit Check® All-In-One Device integrates our premium Spectra™ bar with SDCs innovative delayed egress electronics. When unauthorized egress is initiated by depressing the push pad of the S6000-101, an audible alarm will sound and an irreversible delay period of 15 seconds will begin. After the delay period has expired, the device unlocks, permitting egress until the device is reset. In a life safety emergency, the device will immediately unlock upon loss of power or when powered by a fire control supervised power supply. **Door contact included for anti tailgate and door prop.**

## APPLICATION INCLUDE:

- Restricting the egress of wandering patients for their own safety
- Restricting the egress of commercial center patrons for security application needs
- Controlling pedestrian traffic in transportation facilities, including airport jetways and tarmacs
- Reducing shoplifting and employee theft
- Compatible with access control for entry using electrified trim on rim and vertical rod devices or using mortise case electrification (Not compatible with rim electric strike)

SECURITY




LISTED

FWAX  
SPECIAL LOCKING  
ARRANGEMENTS

Single: 24VDC @ 540 mA

Pair: 24VDC @ 790 mA

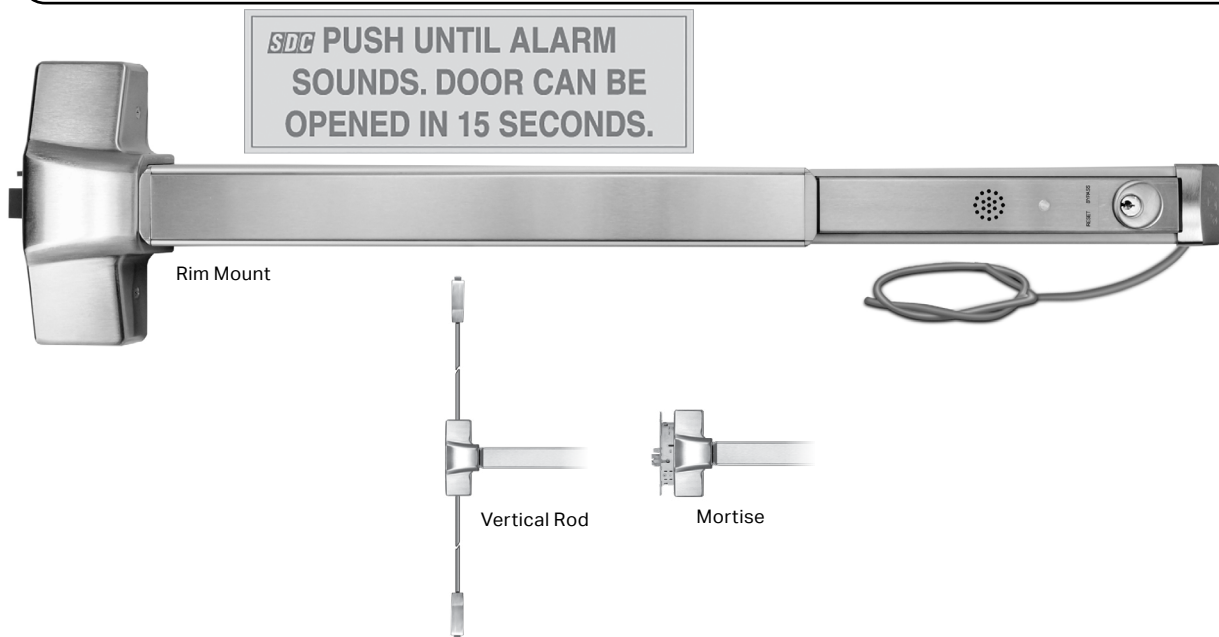


SPECIFY DEVICE				LIST
<b>S61</b>	Rim mount exit device			<b>665.00</b>
<b>S62</b>	Surface Vertical - ROD GUARDS SUGGESTED			<b>998.00</b>
<b>S63</b>	Mortise <b>[03 Lever Trim included]</b> - specify: <b>EE or GE</b> Eclipse Escutheon or Galaxy Escutheon			<b>1,220.00</b>
SPECIFY FUNCTION				
<b>01</b>	Exit Only	<b>02</b>	Dummy	<b>03</b> Nightlatch
				<b>N/C</b>
SPECIFY PANIC OR FIRE RATED				Add to List
<b>P</b>	Panic	<b>N/C</b>	<b>F</b> Fire	<b>122.00</b>
SPECIFY HAND (Mortise Only)				
<b>RR</b>	Right hand reverse bevel, RHRB	<b>LR</b>	Left hand reverse bevel, LHRB	<b>N/C</b>
SPECIFY FINISH				
<b>U</b>	630 Dull Stainless Steel			<b>N/C</b>
SPECIFY LENGTH				Add to List
<b>36</b>	For 36" Door (standard)	<b>N/C</b>	<b>42</b> For 42" Door <b>23.00</b>	<b>48</b> For 48" Door <b>45.00</b>


# Exit Check® - Delayed Egress All-In-One Device

Distributor Discount Code **XK**

S61000-101 Rim Device  
Single Door Application

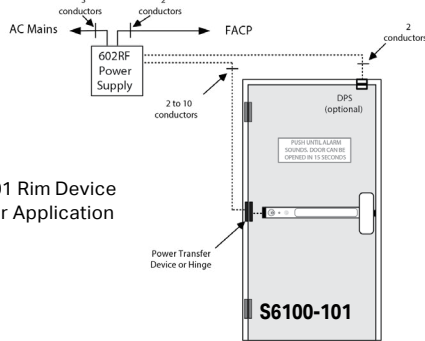

S62000-101 Surface  
Vertical Rod Device  
Double Door Application

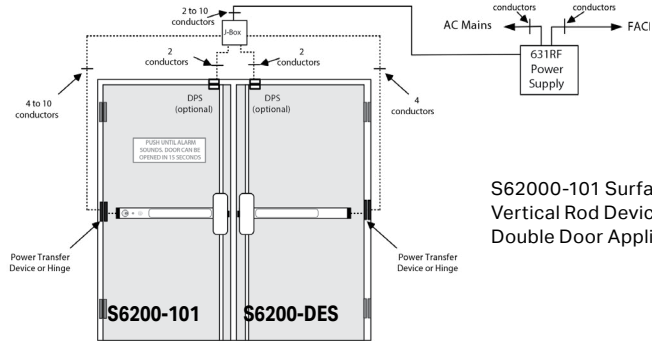

## SPECIFY DELAYED EGRESS

Add to List

<b>101</b>	Electrification of master exit device and integrated controller with key switch control and reset, less cylinder	<b>1,497.00</b>
<b>DES</b>	For pair of doors, additional exit device equipped with delayed egress mechanism, less integrated controller. <b>Must be ordered together with 101 device.</b>	<b>555.00</b>

## SPECIFY OPERATION

If no Code is specified - ND is the SDC STANDARD OPERATIONS MODE for this product

<b>NC</b>	<b>IBC, IFC, NFPA 101, NFPA 1-UFC, UBC, SBC Compliant</b> Fixed 15 exit delay, 1 or 2 second nuisance delay Calif. Building Code OSHPD/Manual Power Up	<b>N/C</b>
<b>ND</b>	<b>IBC, IFC, NFPA 101, NFPA 1-UFC, UBC, SBC Compliant</b> Fixed 15 exit delay, 1 or 2 second nuisance delay	<b>N/C</b>
<b>BC</b>	<b>BOCA National Building Code and Chicago Building Code</b> 15 second fixed exit delay, 0 second nuisance delay, auto reset 30 seconds after door closure	<b>N/C</b>
<b>BD</b>	<b>BOCA National Building Code</b> 15 second fixed exit delay, 1 or 2 second nuisance delay, auto reset 30 seconds after door closure	<b>N/C</b>

## SPECIFY TRIM (optional)

Add to List

FOR S61 RIM AND S62 SURFACE ONLY - FOR S63 TRIM SEE PAGE 47

**Mechanical Trim** (less cylinder)

<b>EK03U</b>	Eclipse Escutcheon	<b>GK03U</b>	Galaxy Escutcheon	<b>249.00</b>
--------------	--------------------	--------------	-------------------	---------------

**Electric Trim (FOR RIM AND VERTICAL ROD ONLY)**

Failsecure, field reversible to failsafe; 4 ft cable and connectors; 600/300 mA @ 12/24VDC

<b>EKE03U</b>	Eclipse style electric trim less mortise cylinder, Stainless Steel Finish	<b>748.00</b>
<b>GKE03U</b>	Galaxy style electric trim less mortise cylinder, Stainless Steel Finish	<b>748.00</b>

**Electronically Controlled Trim (FOR MORTISE ONLY)**

<b>MS</b>	Failsecure	<b>MF</b>	Failsafe	<b>222.00</b>
-----------	------------	-----------	----------	---------------

**TRIM OPTIONS** Rim Cylinder Required for 03 function, Mortise Cylinder Required for S6300 Add to List

<b>CYL-6KDQ</b>	6 pin, 1.125" mortise cylinder, keyed different, dull chrome	<b>49.00</b>
<b>CYL-6KAQ</b>	6 pin, 1.125" mortise cylinder, keyed alike, dull chrome	<b>49.00</b>
<b>RIM-CYL-KA</b>	Rim Cylinder for 03 Function, keyed alike - see page 45 for more info	<b>37.00</b>

## SPECIFY POWER TRANSFER (For the entire line of Power Transfer, see page 97 and page 98)

LIST

<b>PTM-10AL</b>	(10) Cond., 5 Amp @ 12/24V AC/ DV, Alum US28	<b>383.00</b>	<b>PTH-10Q</b>	(10) Cond., 1 Amp @ 12/24V per pair, 4.5" x 4.5"	<b>217.00</b>
<b>PT-5</b>	UL Listed Concealed Power Transfer Device, less wires	<b>67.00</b>	<b>PT-3V</b>	Armored flex conduit, less wires, with wire junction box	<b>50.00</b>

## SPECIFY POWER SUPPLY (For the entire line of Power Supplies, see page 100)

LIST

<b>602RF</b>	1 Amp, class 2 output, 12" W x 12" H x 3.75" D box	<b>284.00</b>
<b>631RF</b>	1.5 Amp, class 2 output, 12" W x 12" H x 3.75" D box	<b>381.00</b>

Note: 600 series Power Supply required with S6000-101 for UL listing



EK



GK



EKE



GKE



PTM Series



PTH x 5  
Ft Cable



PT5



PT-3V

602RF  
(shown)



600 Series  
Power Supply