



SECURITY DOOR CONTROLS ■ WWW.SDCSECURITY.COM  
 801 Avenida Acaso, Camarillo, CA 93012  
 [t] 800.413.8783 ■ 805.494.0622 ■ E-mail: service@sdsecurity.com

**TEMPLATE-S6103**

**Devices covered by this template:**  
**Panic / Fire Rim Exit Device with 03 Nightlatch Trim**


THIS SIDE UP FOR LHR DOOR

FOLD HERE  
**CAUTION**  
 DO NOT USE DOOR EDGE

**(4x) DEVICE MOUNTING HOLES**  
 TRIM: DRILL 5/16" CLEARANCE HOLES ON PUSH SIDE,  
 15/32" HOLES ON PULL SIDE.

**(2x) STRIKE MOUNTING HOLES**  
 METAL: DRILL / TAP FOR 1/4" - 20 MACHINE SCREWS  
 WOOD: PRE-DRILL 1/8" HOLES

**(2x) END CAP BRACKET HOLES**  
 METAL: DRILL / TAP FOR 1/4"-20 MACHINE SCREWS.  
 WOOD: PRE-DRILL 1/8" HOLES.  
 SEXBOLTS: DRILL 5/16" CLEARANCE HOLES ON PUSH SIDE, 3/8" ON PULL SIDE.

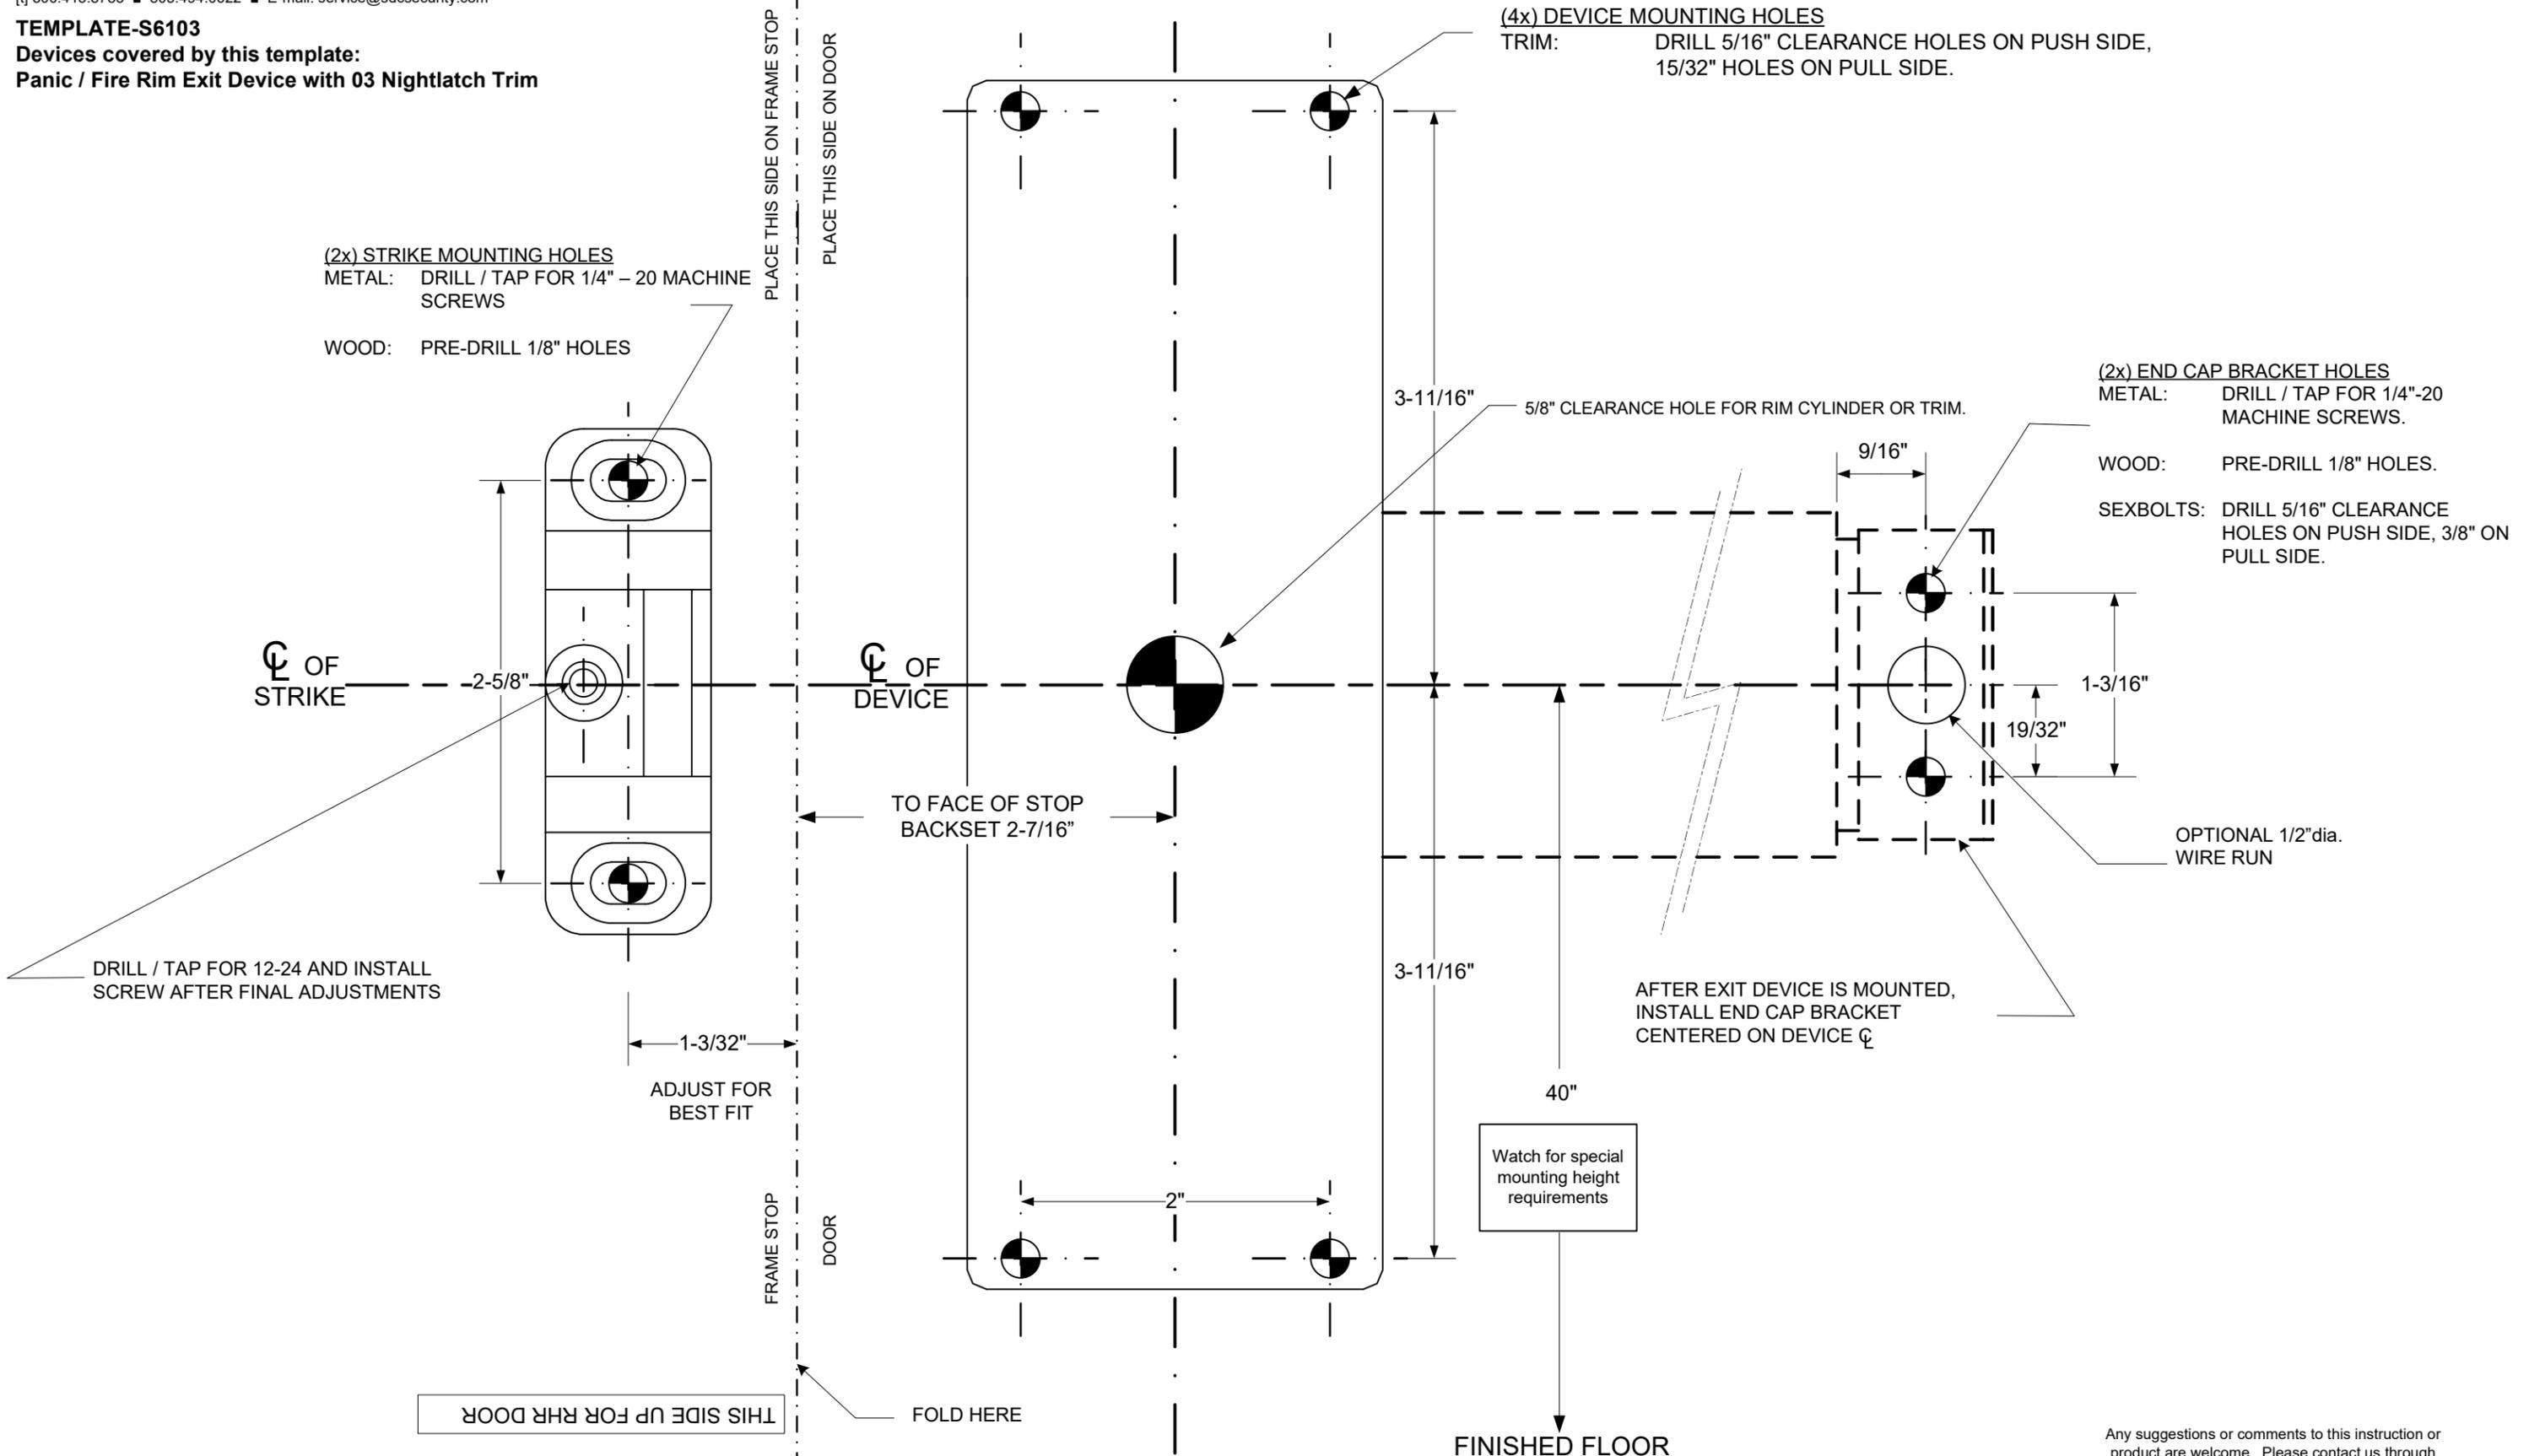

☉ OF STRIKE

☉ OF DEVICE

DRILL / TAP FOR 12-24 AND INSTALL SCREW AFTER FINAL ADJUSTMENTS

1-3/32"  
 ADJUST FOR BEST FIT

TO FACE OF STOP BACKSET 2-7/16"

AFTER EXIT DEVICE IS MOUNTED, INSTALL END CAP BRACKET CENTERED ON DEVICE ☉

Watch for special mounting height requirements

FINISHED FLOOR



### TEMP-EK03 & GK03 03 NIGHTLATCH TRIM

