


801 Avenida Acaso, Camarillo, Ca. 93012
 • (805) 494-0622 • Fax: (805) 494-8861
 www.sdcsecurity.com • E-mail: service@sdcsecurity.com

**TEMPLATE-S6200
 SURFACE MOUNT VERTICAL ROD**

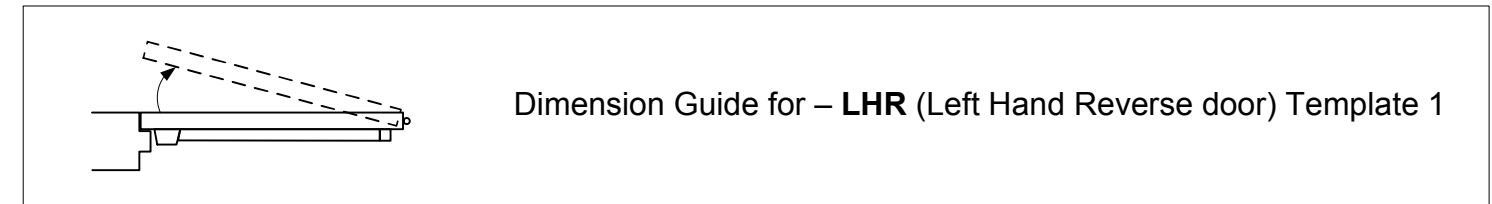

1. Draw a centerline horizontally across the door, 40" (1016mm) from bottom of door.
2. Draw a vertical centerline 2-7/16" (62mm) from edge of door.
3. Select the appropriate side of both templates. (1 & 2). Your door handing will determine the appropriate side, either **(LHR)** or **(RHR)**.
4. Using dimensions indicated on templates 1 & 2, locate and mark the center of the required holes.
5. Drill holes as indicated by their designated letter.
6. If using an exterior trim, refer to the template with trim to further prepare door.


A **METAL – Panic Rated:** Drill/Tap for 1/4-20 machine screws (sexbolts recommended).
METAL – Fire Rated: Sexbolts required.
SEXBOLTS: Drill 3/8" (9.5mm) clearance holes on Push and Pull Sides.
WOOD: Pre-Drill 1/8" (3mm) hole.

B **ACTUATING SHAFT HOLE:** Drill 1/2" thru hole.

! DIMENSIONS ON THIS PUBLICATION MAY NOT BE TO SCALE. DO NOT USE TEMPLATE TO MARK DISTANCES


EXIT DEVICE

40" (1016mm)
To Finished Floor



TEMPLATE 1

Dimension Guide for – **RHR** (Right Hand Reverse door) Template 2



1. Draw a centerline horizontally across the door, 40" (1016mm) from bottom of door.
2. Draw a vertical centerline 2-7/16" (62mm) from edge of door.
3. Select the appropriate side of both templates. (1 & 2). Your door handing will determine the appropriate side, either (**LHR**) or (**RHR**).
4. Using dimensions indicated on templates 1 & 2, locate and mark the center of the required holes.
5. Drill holes as indicated by their designated letter.
6. If using an exterior trim, refer to the template with trim to further prepare door.

METAL – Panic Rated: Drill/Tap for 1/4-20 machine screws (sexbolts recommended).
METAL – Fire Rated: Sexbolts required.
SEXBOLTS: Drill 3/8" (9.5mm) clearance holes on Push and Pull Sides.
WOOD: Pre-Drill 1/8" (3mm) hole.

ACTUATING SHAFT HOLE: Drill 1/2" thru hole.

DIMENSIONS ON THIS PUBLICATION **MAY NOT BE TO SCALE. DO NOT USE TEMPLATE TO MARK DISTANCES**

