
**SELECTRIC**<sup>®</sup> **Pro Locksets** incorporate an SDC manufactured Grade 1 Heavy Duty mortise lockset and vandal resistant clutch mechanism. Proprietary to SDC, SELECTRIC<sup>®</sup> Pro locksets. All operational attributes are field selectable. In addition, SELECTRIC<sup>®</sup> Pro locksets retrofit many other mechanical lock brands making them fully compatible with new and retrofit applications.

## FIELD SELECTABLE ATTRIBUTES (SEE DATASHEET FOR SPECIFIC MODELS)

- Selectable mode, failsafe or failsecure Selectable function, locked outside only or both sides
- Selectable voltage, 12 or 24VDC

\* CFSM Listed Models

Selectable handing

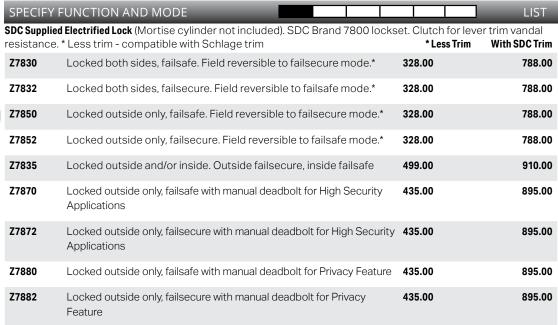

LISTED

Electrically Con-

trolled Single Point

Locks or Latches

3 Hr A Label Fire

Rated Doors

CSFM

3773-0324:104

Distributor Discount Code LSK


MEA

City of New York

768-80-SA







VOLTAGE - Z7835/7870/7872/7880	/7882 ONLY	
Specify voltage for Z7835/7870/7872/78	80/7882 function only.	
Leave blank for all other functions which a	are 12/24VDC, field selectable	
E 12VDC	<b>C</b> 24VDC	N/C

SPECIFY HAND						I		]	
L Left hand	LR	Left hand reversed		All hand	s are field	drevers	ible		N/C
<b>R</b> Right hand	RR	Right hand reversed	W	vithout disas	sembly (	exeptio	n Z783	5)	N/C

SPECIFY FINISH						Add to List
605, 606, 611,612 Finish not available for Z7870, Z7872, Z7880, Z7882						
<b>Q</b> 626 Dull Chrome (standard)	N/C					
<b>C</b> 605 Bright Brass	56.00	<b>G</b> 612 Dull Bron	ze 5	56.00 S	629 Bright Stainl Steel	ess 56.00
<ul><li><b>D</b> 606 Dull Brass</li><li><b>F</b> 611 Bright Bronze</li></ul>	56.00 56.00	<ul><li>H 613 Oil Rubbe</li><li>P 625 Bright Ch</li></ul>		i6.00 l	630 Dull Stainles	ss Steel 56.00

SELECTRIC™ PRO	SELECTRIC™ PRO Z7800 Electric Lockset		
	OPTIONS		Add to List
	Optional Outputs		
		side lever operation for access control request or CCTV activation, SPDT 5 Amp @ 30VDC	-to-exit input, alarm 89.00
	D Door position status output. (7830/7832/7850/7852 only)	Indicates door open and door closed. SPDT 5	Amp @ 30VDC. 89.00
		out. Indicates door latched and locked and doo D/7832/7850/7852/7835 only)	r unlocked. 112.00
	L Latch Status (7870/7872/788	30/7882 only), SPDT 5Amp@30VDC	89.00

		10	
B Deadbolt Status (7870/7872/7880/78	82 only), SPDT	5Amp@30VDC	

SPECIFY LEVER TRIM			Add to List
G Galaxy with rose	N/C	GE Galaxy with escutcheon	112.00
E Eclipse with rose	N/C	EE Eclipse with escutcheon	112.00
N Nova with rose	N/C	<b>NE</b> Nova with escutcheon	112.00
07 Schlage equal with SDC B rose	N/C	07E Schlage equal with SDC escutcheor	112.00

## Single Trim Option (add to List)

STM Single side trim mount adapter



ACCESSOR	ES	Add to List
Optional Cable a	and Connectors	
CC1-5	5ft. Cable and connectors for locks without optional outputs	50.00
CC1-5-70/80	5ft. Cable and connectors for for Z7870/72/80/82 without optional outputs	50.00
CC3-5-70/80	5ft. Cable and connectors for for Z7870/72/80/82 with optional outputs	67.00
CC3-5	5ft. Cable and connectors for locks with optional outputs	67.00

/03-3-/0/00	Sit. Cable and connectors for for 27870/72780/82 with optional outputs	07.00
C3-5	5ft. Cable and connectors for locks with optional outputs	67.00

**Optional Key Cylinders** 1 required for 7850/7852/7870/7872/7880/7882 2 required for 7830/7832/7835

CYL-6KDQ	6 pin, 1.125" keyed different, 626 Dull Chrome	A	49.00
CYL-6KAQ	6 pin, 1.125" keyed alike, 626 Dull Chrome		49.00
863M	Cam for Z7870/72/80/82 - Required for use with CYL cylinder	A	11.00

## **Power Transfer Hinge**

UL listed, 4.5" >	x 4.5", five knuckle hinge.	
PTH-4Q	Four wire, dull chrome	164.00
PTH-10Q	Ten wire, dull chrome	217.00

UL 10B Listed for 3Hr Fire Rated Doors See page 97

PTH

89.00

156.00