




INSTALLATION INSTRUCTIONS

480-1SB / 480-1FB NARROW SURFACE & FLUSH MOUNT BOX FOR NARROW STYLE SWITCHES

CROSS SECTIONAL VIEWS

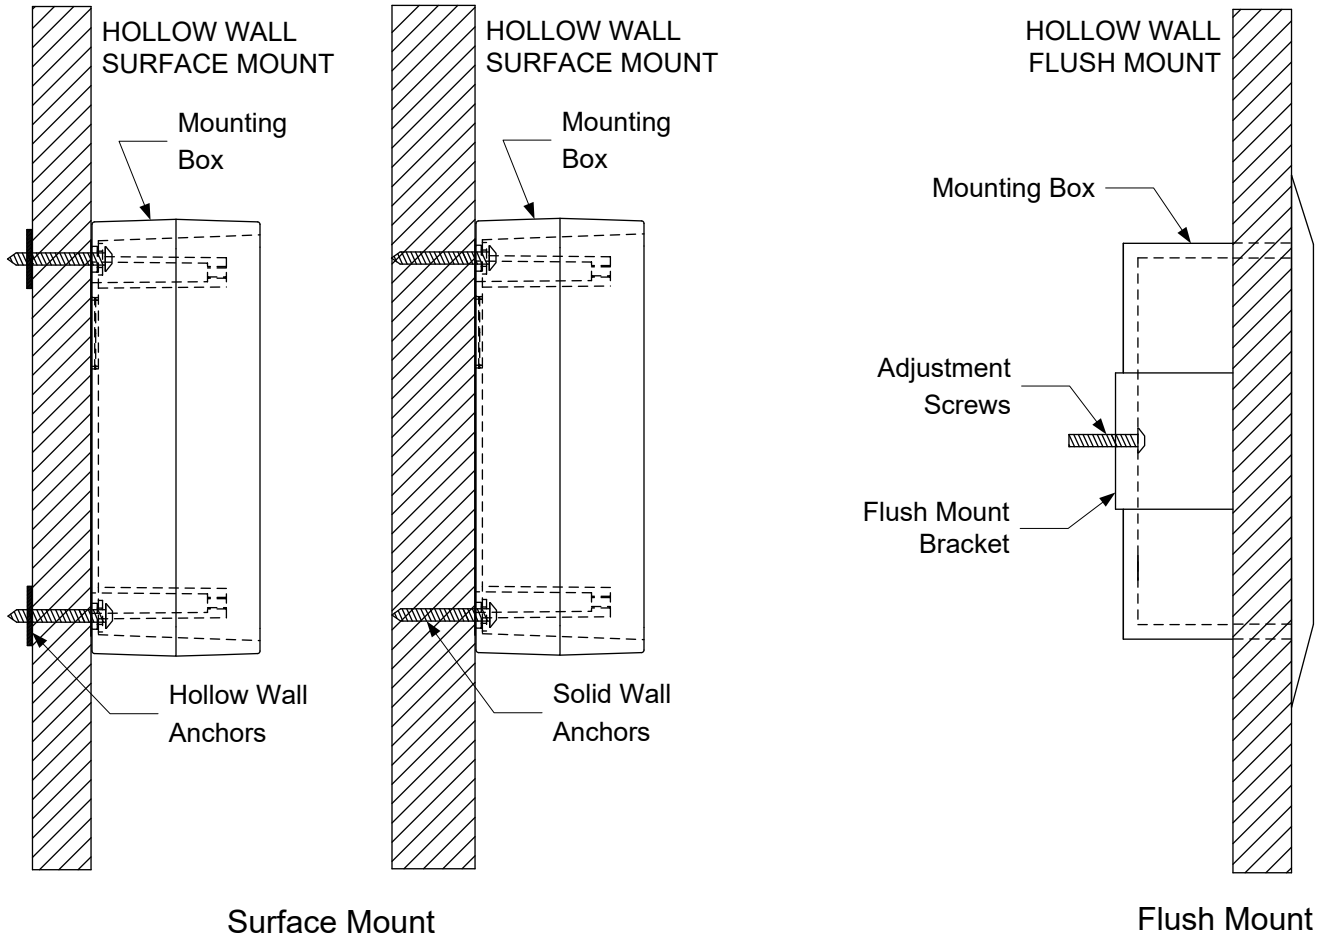

Surface Mount

Flush Mount

Parts included with mounting boxes: >Black ABS surface or flush mount box >Mounting instructions >Flush Mount Bracket & Adjustment Screws (480-1FB Model only).

480-1SB SURFACE MOUNT: *Hollow Wall or Solid Wall* 1] Drill pilot holes in mounting surface (use Mounting Box as template). 2] Insert appropriate fastener (screw, toggle, etc.) through box and into mounting surface; tighten. 3] Complete installation of the switch.

480-1FB FLUSH MOUNT: *Hollow Wall ONLY* 1] Cut access hole into mounting surface 2" wide by 5" tall. 2] Insert box into the access hole with the Flush Mount Bracket loosely mounted on box. 3] Tighten Adjustment Screws to secure Flush Mount Bracket against back surface of hollow wall. 4] Complete installation of the switch.



480-1SB

Dimensions: Height: 5-3/16" (132mm)
Width: 1-13/16" (25.5mm)
Inside Depth: 1-7/8" (48mm)
Used with Narrow style switches

480-1FB

Height: 5-3/4" (146mm)
Width: 2-1/2" (63.5mm)
Inside Depth: 1-7/8" (48mm)
Used with Narrow style switches

