

EMERGENCY DOOR RELEASE

V List

491



SDC 490 series emergency door release stations include 2-SPDT contacts for release of all doors on the same circuit and remote annunciation. A built-in local alarm is standard.

491 Blue break glass station, emergency door release, 2-SPDT 10 Amp contacts with built-in local alarm (12/24V), 2 replacement glass included. Single gang box mounted **184.00**

491-GL4 Four replacement glass plates for 491 **20.00**

491-BB Blue surface mount box for 491 **60.00**

492



492 Blue pull station, emergency door release, 2-SPDT 10 Amp contacts with built-in local alarm (12/24V), 2 replacement glass rods included. Single gang box mounted. **150.00**

492-GL4 Four replacement glass rods for 492 **20.00**

492-BB Blue surface mount box for 492 **40.00**

EMERGENCY ACCESS PANEL

CK List



APB1000A

APB1000A Emergency access panel for lobby door system. Mushroom button with key reset and siren **350.00**

WALL MOUNT ANNUNCIATOR

CK List



400L-2

Standard Finish 630 Stainless Steel

400U-L2 Two LEDs. Specify lens color. Standard Finish **40.00**

400U-L3 Three LEDs. Specify lens color. Standard Finish **48.00**

400U-LT1 One tricolor LED. Red, Green and Amber. Standard Finish **40.00**

400U-LT2 Two tricolor LED. Red, Green and Amber. Standard Finish **50.00**

SIRENS AND BUZZERS

CK List



400-SN



400-RMB

Standard Finish 630 Stainless Steel

400U-RMB Buzzer on 1 gang plate. Specify 12VDC or 24VDC, 20mA max **40.00**

400NU-RMB Buzzer on narrow plate. Specify 12VDC or 24VDC, 20mA max **40.00**

400U-SN Siren on 1 gang plate, 3 - 28VDC, 18mA max **50.00**

400NU-SN Siren on narrow plate, 3 - 28VDC, 18mA max **50.00**

COMMUNICATING BATHROOM CONTROLS

CK List



CB401-A
CB402-A



CB401-B
CB402-B

EmLock® or Bolt Lock Application

CB401-AU Communicating bath switch, 630 Stainless Steel finish. **80.00**

CB401-B Emergency access switch, red. 2 Required **80.00**

CB701 Emergency key switch, red **150.00**

Electrified Lockset Application

CB402-A Communicating bath switch, U 630 Stainless Steel finish. **80.00**

CB402-B Emergency access switch, red. 2 Required **80.00**

CB702 Emergency key switch, red **150.00**

Reference page 13 for system operation and component requirements

DESK SWITCH IN COMPACT BOX

DK List

15-2



15-1 AA, SPDT push switch, 6 Amp @ 30VAC/DC **100.00**

15-2 MO, SPDT push switch, 10 Amp @ 30VAC/DC **68.00**

15-3 AA, SPDT toggle switch, 6 Amp @ 30VAC/DC **120.00**

15-2-3 (1) MO push switch and (1) AA (on/off) toggle SPDT, 6 Amp @ 30VAC/DC **170.00**



15-1 15-3 15-2-3

TIME DELAY RELAY

CK

List



Time Delay Relays

10TD	Time delay relay module with adjustable 1-60 second relock delay. Input: 12/24V AC/DC Voltage: 2 Amps @ 30 VDC (<i>resistive</i>)	Output: SPDT, dry contact Size: 2-1/4" x 1-1/2" x 3/4"	80.00
-------------	---------------------------------------------------------------------------------------------------------------------------------------------------------	-------------------------------------------------------------------------	--------------

TIMERS

CK

List



14-2	7 day programmable timer with memory battery back-up capability Output: 1 SPDT, dry contact Voltage: 16 Amps @ 30 VAC/DC Specify 12V AC/DC or 24 AC/DC	240.00
-------------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------	---------------

PASSIVE INFRARED EGRESS CONTROL

V

List




MD-31D-W	Motion detector with time delay, white	220.00
MD-31D-B	Motion detector with time delay, black	220.00

DOOR POSITION SENSORS

V

List

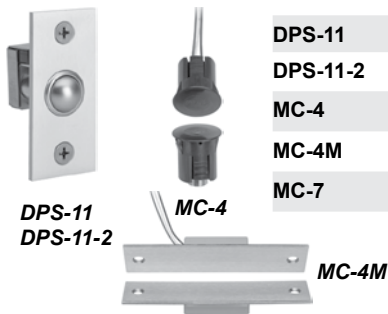

DPS-11	Adjustable ball type SPDT 5 Amp	40.00
DPS-11-2	Adjustable ball type 2 SPDT 5 Amp	60.00
MC-4	Recessed magnetic (3/4", SPDT, 30VDC, 50mA)	24.00
MC-4M	Recessed magnetic mounted on 1-1/4" x 4-7/8" plate	78.00
MC-7	Biased high security recessed magnetic (1", SPDT, 30VDC, 50mA)	60.00


LATCH AND DEADBOLTS MONITORING STRIKE KITS

DK

List

Provides latch and or deadbolt position status. Compatible with deadbolts, cylindrical locks, mortise locks, and mortise locks with latch and deadbolt. Strike plates shown provided by others.

5 Amp @ 30 VAC/DC

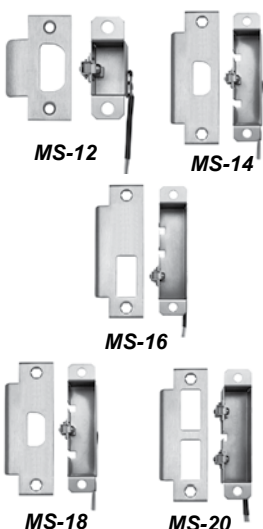

MS-12	Cylindrical latch monitor 2-3/4" SPDT	120.00
MS-12D	Cylindrical latch monitor 2-3/4" DPDT	150.00
MS-14	Cylindrical latch monitor 4-7/8" SPDT	120.00
MS-14D	Cylindrical latch monitor 4-7/8" DPDT	150.00
MS-16	Mortise lock latch monitor SPDT	120.00
MS-16D	Mortise lock latch monitor DPDT	150.00
MS-18	Mortise lock deadbolt monitor SPDT	120.00
MS-18D	Mortise lock deadbolt monitor DPDT	160.00
MS-20*	Mortise lock latch and deadbolt monitor SPDT	150.00
MS-20D*	Mortise lock latch and deadbolt monitor DPDT	200.00

*MS-20 and MS-20D are handed but reversible

PTH SERIES POWER TRANSFER HINGE



LZK

LIST



10B Listed For
3 Hrs Fire Rated Doors

Features

- 5' Ft Cable
- UL10B Listed for 3 Hour Fire Rated Doors.
- 800,000 cycles. 8 times UL test criteria
- Wire Replacement Warranty

Power Transfer Hinge Application

Installed in the center hinge position of the door, PTH Power Transfer Hinges provide the concealed wires required to transfer power from the frame to electric hardware in the door for control and monitoring capability.



PTH x 5 Ft Cable



**PTH x 5 Ft Cable
And Door Position Switch**

PTH-4Q	Four (4) Conductor Power Transfer Hinge 1 Amp @ 12/24V per pair 4.5" x 4.5" standard weight, 626 Dull Chrome	150.00
PTH-4Q-DPS	Four (4) Conductor Power Transfer Hinge with Door Status Contact 1 Amp @ 12/24V per pair Door Status Contact: 250 mA @ 30VDC 4.5" x 4.5" standard weight, 626 Dull Chrome	200.00
PTH-10Q	Ten (10) Conductor Power Transfer Hinge 1 Amp @ 12/24V per pair 4.5" x 4.5" standard weight, 626 Dull Chrome	195.00
PTH-10Q-DPS	Ten (10) Conductor Power Transfer Hinge with Door Status Contact 1 Amp @ 12/24V per pair Door Status Contact: 250 mA @ 30VDC 4.5" x 4.5" standard weight, 626 Dull Chrome	250.00
FOR VON DUPRIN EL 33 AND 99 SERIES EXIT DEVICES AND OTHER HIGH INRUSH DEVICES The PTH-2-4 hinges have been tested with Von Duprin* EL devices and Von Duprin power booster at Underwriters Laboratories.		
PTH-2-4Q	16 Amp Inrush, 6 conductor power transfer hinge 1-pair 16 Amp inrush, 4 Amp continuous; 2-pair 1 Amp @ 12/24V 4.5" x 4.5" standard weight, 626 Dull Chrome	175.00
PTH-2-4QDPS	16 Amp Inrush, 6 conductor power transfer hinge, with door status contact 1-pair 16 Amp inrush, 4 Amp continuous; 2-pair 1 Amp @ 12/24V Concealed Door Position Contact, 250 mA @ 30VDC 4.5" x 4.5" standard weight, 626 Dull Chrome	225.00

SPECIFY FINISH

Dull Chrome finish is standard as specified by suffix Q.
To specify special finish, designate finish suffix below in lieu of Q.

C 605 Bright Brass	H 613 Oil Rubbed Bronze	P 625 Bright Chrome	N/C
---------------------------	--------------------------------	----------------------------	------------

PTM HEAVY DUTY SERIES ELECTRIC POWER TRANSFER DEVICE



LZK

LIST



Miscellaneous Fire
Door Accessories
UL 10C 3 Hr Fire Rated
Classified per UBC 7-2

PTM-2AL	Two (2) Conductor Power Transfer Device: Two (2) 18 Ga. wires 5 Amp @ 12/24V AC/DV Aluminum Powder Coat, US28 equivalent	358.00
PTM-2BZ	Two (2) Conductor Power Transfer Device: Two (2) 18 Ga. wires 5 Amp @ 12/24V AC/DV Dark Brown Powder Coat, US10B equivalent	358.00
PTM-10AL	Ten (10) Conductor Power Transfer Device: Ten (10) 24 Ga. wire 1 Amp @ 12/24V AC/DC Aluminum Powder Coat, US28 equivalent	358.00
PTM-10BZ	Ten (10) Conductor Power Transfer Device: Ten (10) 24 Ga. wire 1 Amp @ 12/24V AC/DC Dark Brown Powder Coat, US10B equivalent	358.00

CONCEALED POWER TRANSFER DEVICE, UL LISTED



Miscellaneous Fire
Door Accessory

PT5

PT-5	UL Listed Concealed Power Transfer Device, for use with all high and low current applications	60.00
-------------	-----------------------------------------------------------------------------------------------	--------------

Also recommended for use with Von Duprin* EL 33 and 99 series and other high inrush devices
*Von Duprin is a registered trademark of IngErsol Rand and Von Duprin. Not intended as endorsement.

POWER TRANSFER LOOPS

V

List



PT-2U



PT-3V

PT-2U	Armored flex conduit, less wires, 18" long, 1/4" ID	18.00
PT-3V	Armored flex conduit, less wires, with wire junction box	40.00

74



SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective February 15, 2009

MINI CONSOLES

WK

List

Mini Consoles provide control for one or two doors. Momentary or maintained push button switches with Bi-Color LED indicators.

Dimensions: 4-1/8" W x 3-1/8" H x 6-1/4" L

Color: Beige

Contacts: 5 Amp @ 30VDC

Power: 24VDC @ 0.02 Amp required for each LED



DTMO-2

DTMO-1

DTMO-1	One momentary switch and one LED	200.00
DTMO-2	Two momentary switches and two LEDs	250.00
DTMOMA-2	One momentary, one maintained switch and two LEDs	300.00
DTMA-2	Two maintained switches and two LEDs	250.00

MODULAR CONTROL CONSOLES

WK

List



TCC AL8 AL4E



RCC AL8 AL8 AL4E

TCC	Slope front desk top console 12 stations maximum when using 2 control panels. Base unit, less panel. Color: black sides and beige top Dimensions: 10-1/4"W x 4-3/4"H x 9-5/8"D	300.00
RCC	Rack mount console. 24 stations maximum when using three control panels. (Maximum is 20 stations with "E" panel) Base unit, less panels. Color: Beige Dimensions: 19"W x 5-1/4"H x 6"D	650.00

Chassis less switches and light panels.

SPECIFY SWITCH AND INDICATOR PANELS

Add to List

Rocker Switch Rating: 3 Amp @ 30VDC

Power Required per LED: 24VDC @ 0.02 Amp

AL4	Four momentary switches with LEDs	500.00
BL4	Four maintained switches with LEDs	500.00
CL4	Four momentary/off/maintained switches with LEDs	500.00
DL4	Four momentary/off/momentary switches with LEDs	500.00
AL8	Eight momentary switches with LEDs	850.00
BL8	Eight maintained switches with LEDs	850.00
CL8	Eight momentary/off/maintained switches with LEDs	850.00
DL8	Eight momentary/off/momentary switches with LEDs	850.00
AL4E	Four momentary switches with LEDs, alarm, reset push button and key lock	600.00
BL4E	Four maintained switches with LEDs, alarm reset push button and key lock	600.00
CL4E	Four momentary/off/maintained switches with LEDs, alarm, reset push button and key lock	600.00
DL4E	Four momentary/off/momentary switches with LEDs, alarm, reset push button and key lock	600.00
EA	Panel with alarm, reset push button and key lock	120.00
F	Blank panel	28.00

CABINETS

Add to List



CAB7	Black cabinet for one RCC 7"H x 20-1/2"W x 14-1/2"D	575.00
CAB12	Black cabinet for two RCC 12-1/2"H x 20-1/2"W x 14-1/2"D	775.00

Price List Effective February 15, 2009

SECURITY DOOR CONTROLS
801 Avenida Acaso • Camarillo, CA 93012
Email: Service@sdsecurity.com • www.sdsecurity.com

