

UniFLEX™ SPEC 55 SERIES ELECTRIC STRIKE, GRADE 1 HEAVY DUTY - Factory tested 2500 lbs

STANDARD ANSI 4-7/8" STRIKE PREP - NO CENTERLINE RELOCATION REQUIRED. 5 YEAR LIMITED WARRANTY

One strike with choice of interchangeable faceplates for cylindrical and mortise locksets with or without deadbolts. Designed for new and retrofit hollow metal frame installations. *Frame face modification required.



Warrack Hersey Tested according to:
 UL 10C, 3 Hr Fire Rated, 4' x 8' single door
 NFPA-252
 CAN4-S104 (ULC-S104)
 (Fail-Secure only).

- Up to 3/4" Latchbolt and 1" Deadbolt
- Field Reversible, Failsafe/Failsecure
- 1/8" Horizontal alignment adjustment
- Dual Voltage 12/24VDC
- Exceeds 1,000,000 cycles
- Factory tested 2500 lbs static strength
- UL tested 1500 lb Static strength
- 70 ft-lb Dynamic strength
- ANSI/BHMA A156.31 Grade 1
- Internal Solenoid, No Heat in Keeper
- All parts stainless steel
- Non-handed




UL 1034
 Burglary-Resistant
 BP10254
 40WH


SPECIFY MODEL Add to List

Lockset compatibility: For locksets not listed below, see UniFLEX™ 55 Series datasheet, page 5, faceplate dimension
Deadbolt Application: 55-D, 55-E and 55-F, door will not close with deadbolt extended


MODEL	Application	
55-A	Compatible locks with all cylindrical locksets with up to 5/8" latch.	420.00
55-B	Mortise locksets and exit mortise devices with or without a deadlatch located below the latchbolt. <i>Accurate, Arrow, Best, Corbin Russwin, Dorma, Falcon, Marks, Sargent, Yale.</i>	440.00
55-C	Mortise locksets and mortise exit devices with or without a deadlatch located above the latchbolt. <i>SDC, Schlage, Baldwin, Hager</i>	440.00
55-D	Mortise locksets with a deadbolt and deadlatch located below the latchbolt. <i>Accurate, Arrow, Best, Corbin Russwin, Dorma, Falcon, Marks, Sargent, Yale.</i>	460.00
55-E	Mortise lockset with deadbolt and no deadlatch feature. <i>Baldwin.</i>	460.00
55-F	Mortise locksets with a deadbolt and a deadlatch located above the latchbolt. <i>SDC, Schlage, Hager.</i>	460.00




55-A




55-B




55-C



55-D



55-E



55-F

SPECIFY FINISH Add to List

U 630 Dull Stainless Steel (std)			N/C
	G 612 Dull Bronze	P 625 Bright Chrome	40.00
D 606 Dull brass	H 613 Oil Rubbed Bronze	Q 626 Dull Chrome	40.00

SPECIFY MONITORING OPTIONS Add to List

LBM/LCM available with 55-A, 55-B, 55-C; LBM/LCM/DBS available with 55-D, 55-E, 55-F

LBM	Latchbolt Monitor. Signals the door is closed and latched or unlatched and open. Non-handed.	60.00
LBM/LCM	Door Secure Monitor. Signals door is closed latched and the keeper is deadlocked. Also signals the door is unlatched or unlocked. Non-handed.	120.00
DBM-L	Deadbolt Monitor, Left Hand (Available with LCM and LBM. For D, E & F functions only)	60.00
DBM-R	Deadbolt Monitor, Right Hand (Available with LCM and LBM. For D, E & F functions only)	60.00

Accessories Add to List

RMB	Buzzer, 12/24V. Indicates strike is energized	36.00
BR64XL	Wire Lead Rectifier. Converts AC to DC	20.00
LT	Tri-Color LED, red or green or amber. Indicates strike energized per field wiring	24.00

Monitoring Configurations


55-A, 55-B, 55-C: LBM LBM/LCM	A	B or C	D or E	F
55-D, 55-E, 55-F: LBM LBM/LCM LBM/LCM/DBM				



SECURITY DOOR CONTROLS
 801 Avenida Acaso • Camarillo, CA 93012
 Email: Service@sdcsecurity.com • www.sdcsecurity.com

Price List Effective February 15, 2009

UniFLEX™ UNIVERSAL STRIKE — MULTI APPLICATION PACK

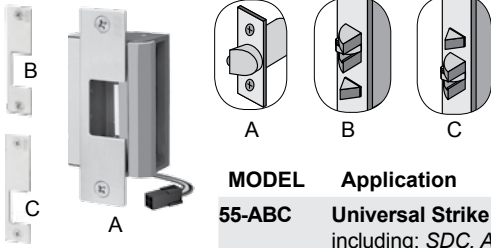

Application

- Adaptable to all **55-A, 55-B, 55C** applications.
- Strike body and 5 faceplates
- For new and retrofit installation
- No relocation of the centerline.
- Non-handed

Operation

After releasing the latchbolt, the keeper returns to the locked position.

Finish: 630 Dull Stainless Steel

MODEL Application

55-ABC	Universal Strike for cylindrical locks, mortise locks without deadbolts and mortise exit devices including: <i>SDC, Accurate, Arrow, Baldwin, Best, Corbin Russwin, Dorma, Falcon, Hager, Marks, Sargent, Schlage, Yale.</i>	460.00
---------------	---	---------------

Lockset compatibility: For locksets not listed, see UniFLEX™ 55 Series datasheet, page 5, faceplate dimension

Monitoring and Special Finishes: See previous page

Price List Effective February 15, 2009

SECURITY DOOR CONTROLS
 801 Avenida Acaso • Camarillo, CA 93012
 Email: Service@sdsecurity.com • www.sdsecurity.com

