




INSTALLATION INSTRUCTIONS

25 SERIES ELECTRIC STRIKE

SDC's 25 series value 1/2" latchbolt electric strikes are centerline latch entry strikes designed for use with cylindrical locksets and metal frames. 25 series strikes accept 1/2" throw latchbolts with 1/8" door gap.


Electric Strike Dimensions

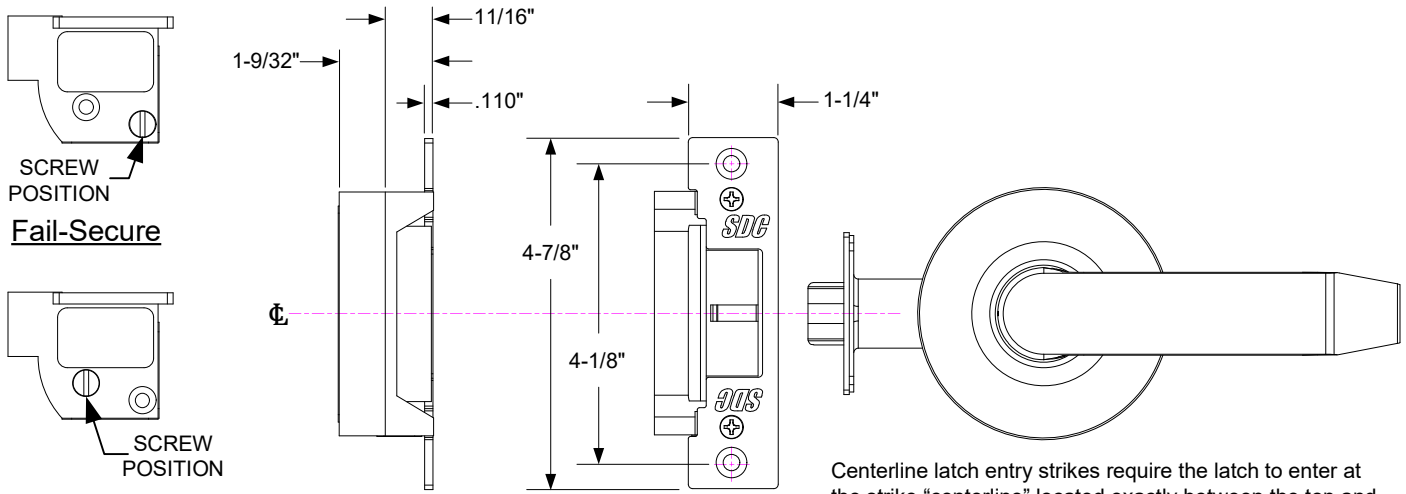


Centerline latch entry strikes require the latch to enter at the strike "centerline" located exactly between the top and bottom of the strike faceplate.
*(Latch Not Provided with Electric Strike).

Change screw position for desired Fail type.

Electric Strike in Metal Frame with preexisting Mounting Tabs

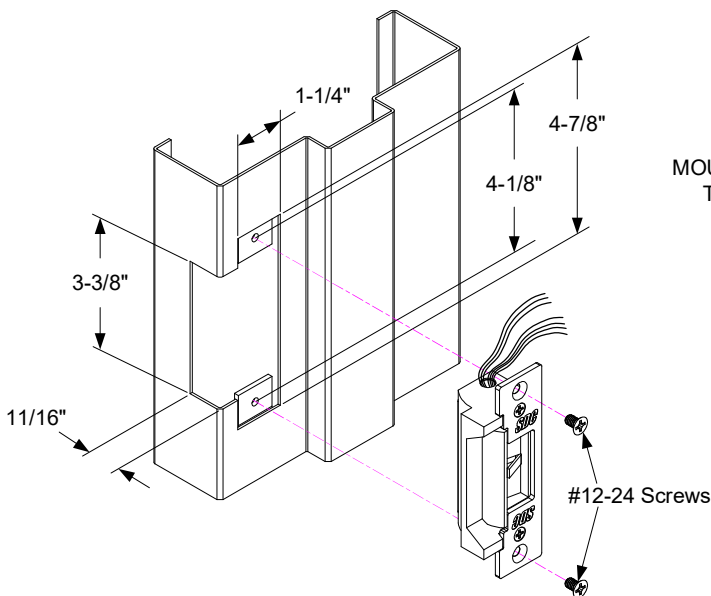

Retrofit Mounting Tabs & Electric Strike in Metal Frame

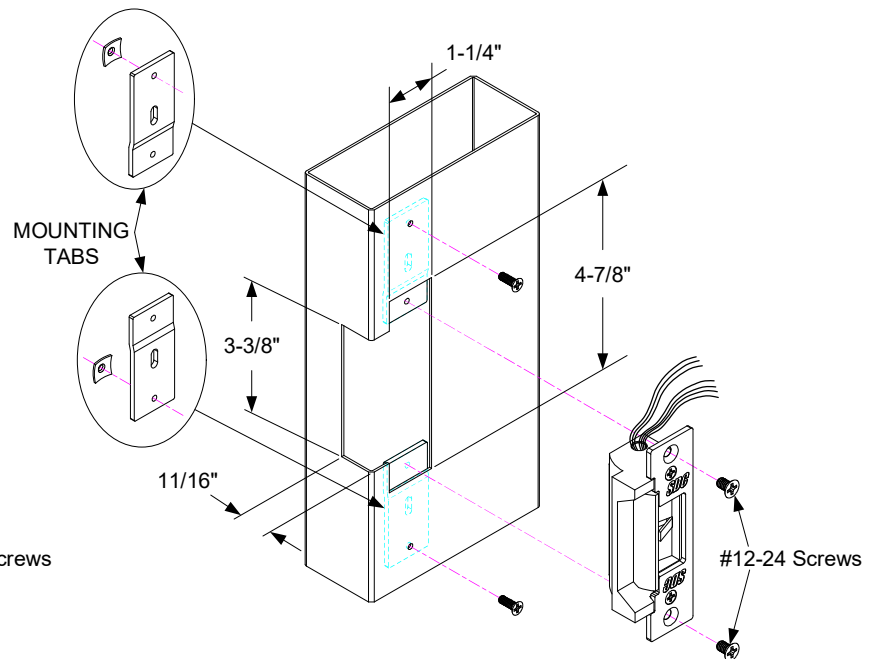

Any suggestions or comments to this instruction or product are welcome. Please contact us through our website or email engineer@sdsecurity.com




ELECTRICAL DATA

25-4U Model
200mA @ 12VDC
150mA @ 24VDC


RMB Option
Buzzer: 12/24VDC @ 10/20mA

12VDC	24VDC
+ ———— RED BLACK - ———— BLUE WHITE	+ ———— RED BLACK BLUE - ———— WHITE


LATCH STATUS	
ORANGE ———▶	N/C
WHITE ———▶	COM
YELLOW ———▶	N/O



WIRE DIAGRAMS

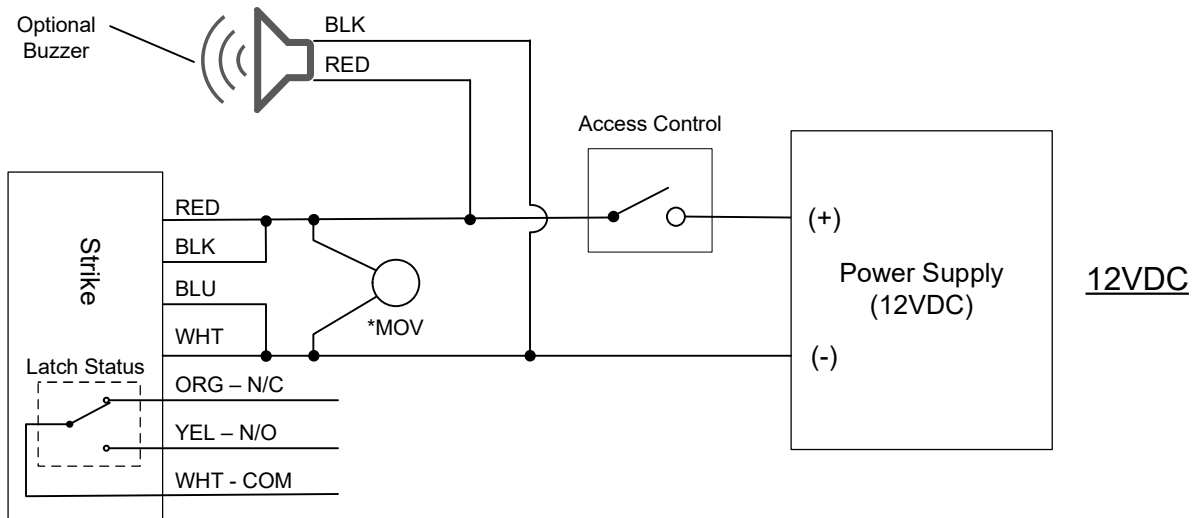

*Install MOV close to the electric strike

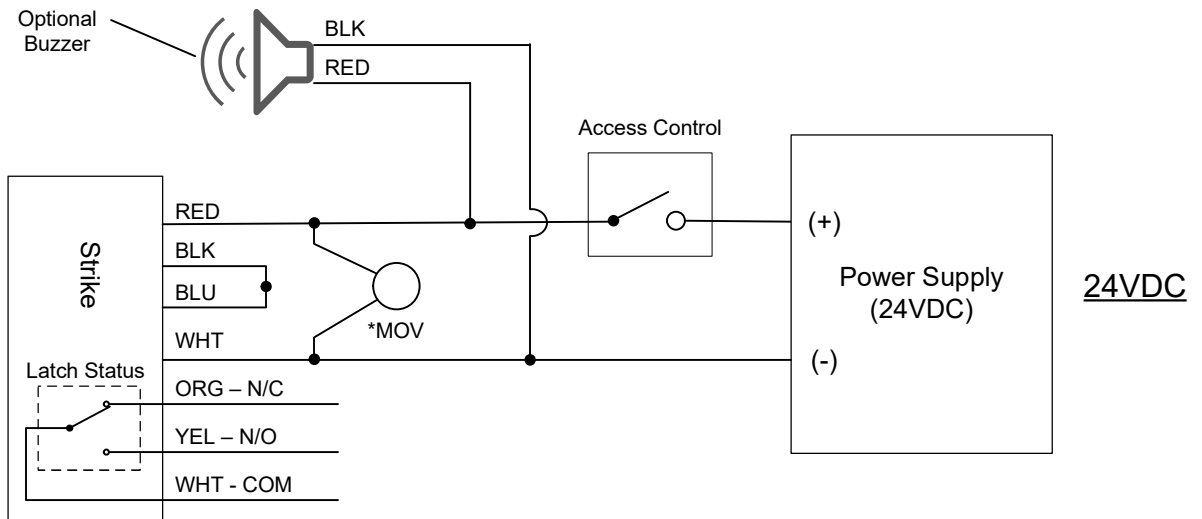

*Install MOV close to the electric strike