



SECURITY DOOR CONTROLS ■ WWW.SDCSECURITY.COM  
 801 Avenida Acaso, Camarillo, CA 93012  
 [t] 800.413.8783 ■ 805.494.0622 ■ E-mail: service@sdsecurity.com

**TEMPLATE-S6202**

**Devices covered by this template:**  
**Panic / Fire SVR Exit Device with 02 Dummy Trim**

THIS SIDE UP FOR LHR DOOR


FOLD HERE  
**CAUTION**  
 DO NOT USE DOOR EDGE

PLACE THIS SIDE ON FRAME STOP

PLACE THIS SIDE ON DOOR

**(4x) DEVICE MOUNTING HOLES**  
 TRIM: DRILL 5/16" CLEARANCE HOLES ON PUSH SIDE,  
 15/32" HOLES ON PULL SIDE.

**(2x) END CAP BRACKET HOLES**  
 METAL: DRILL / TAP FOR 1/4"-20  
 MACHINE SCREWS.  
 WOOD: PRE-DRILL 1/8" HOLES.  
 SEXBOLTS: DRILL 5/16" CLEARANCE  
 HOLES ON PUSH SIDE, 3/8" ON  
 PULL SIDE.

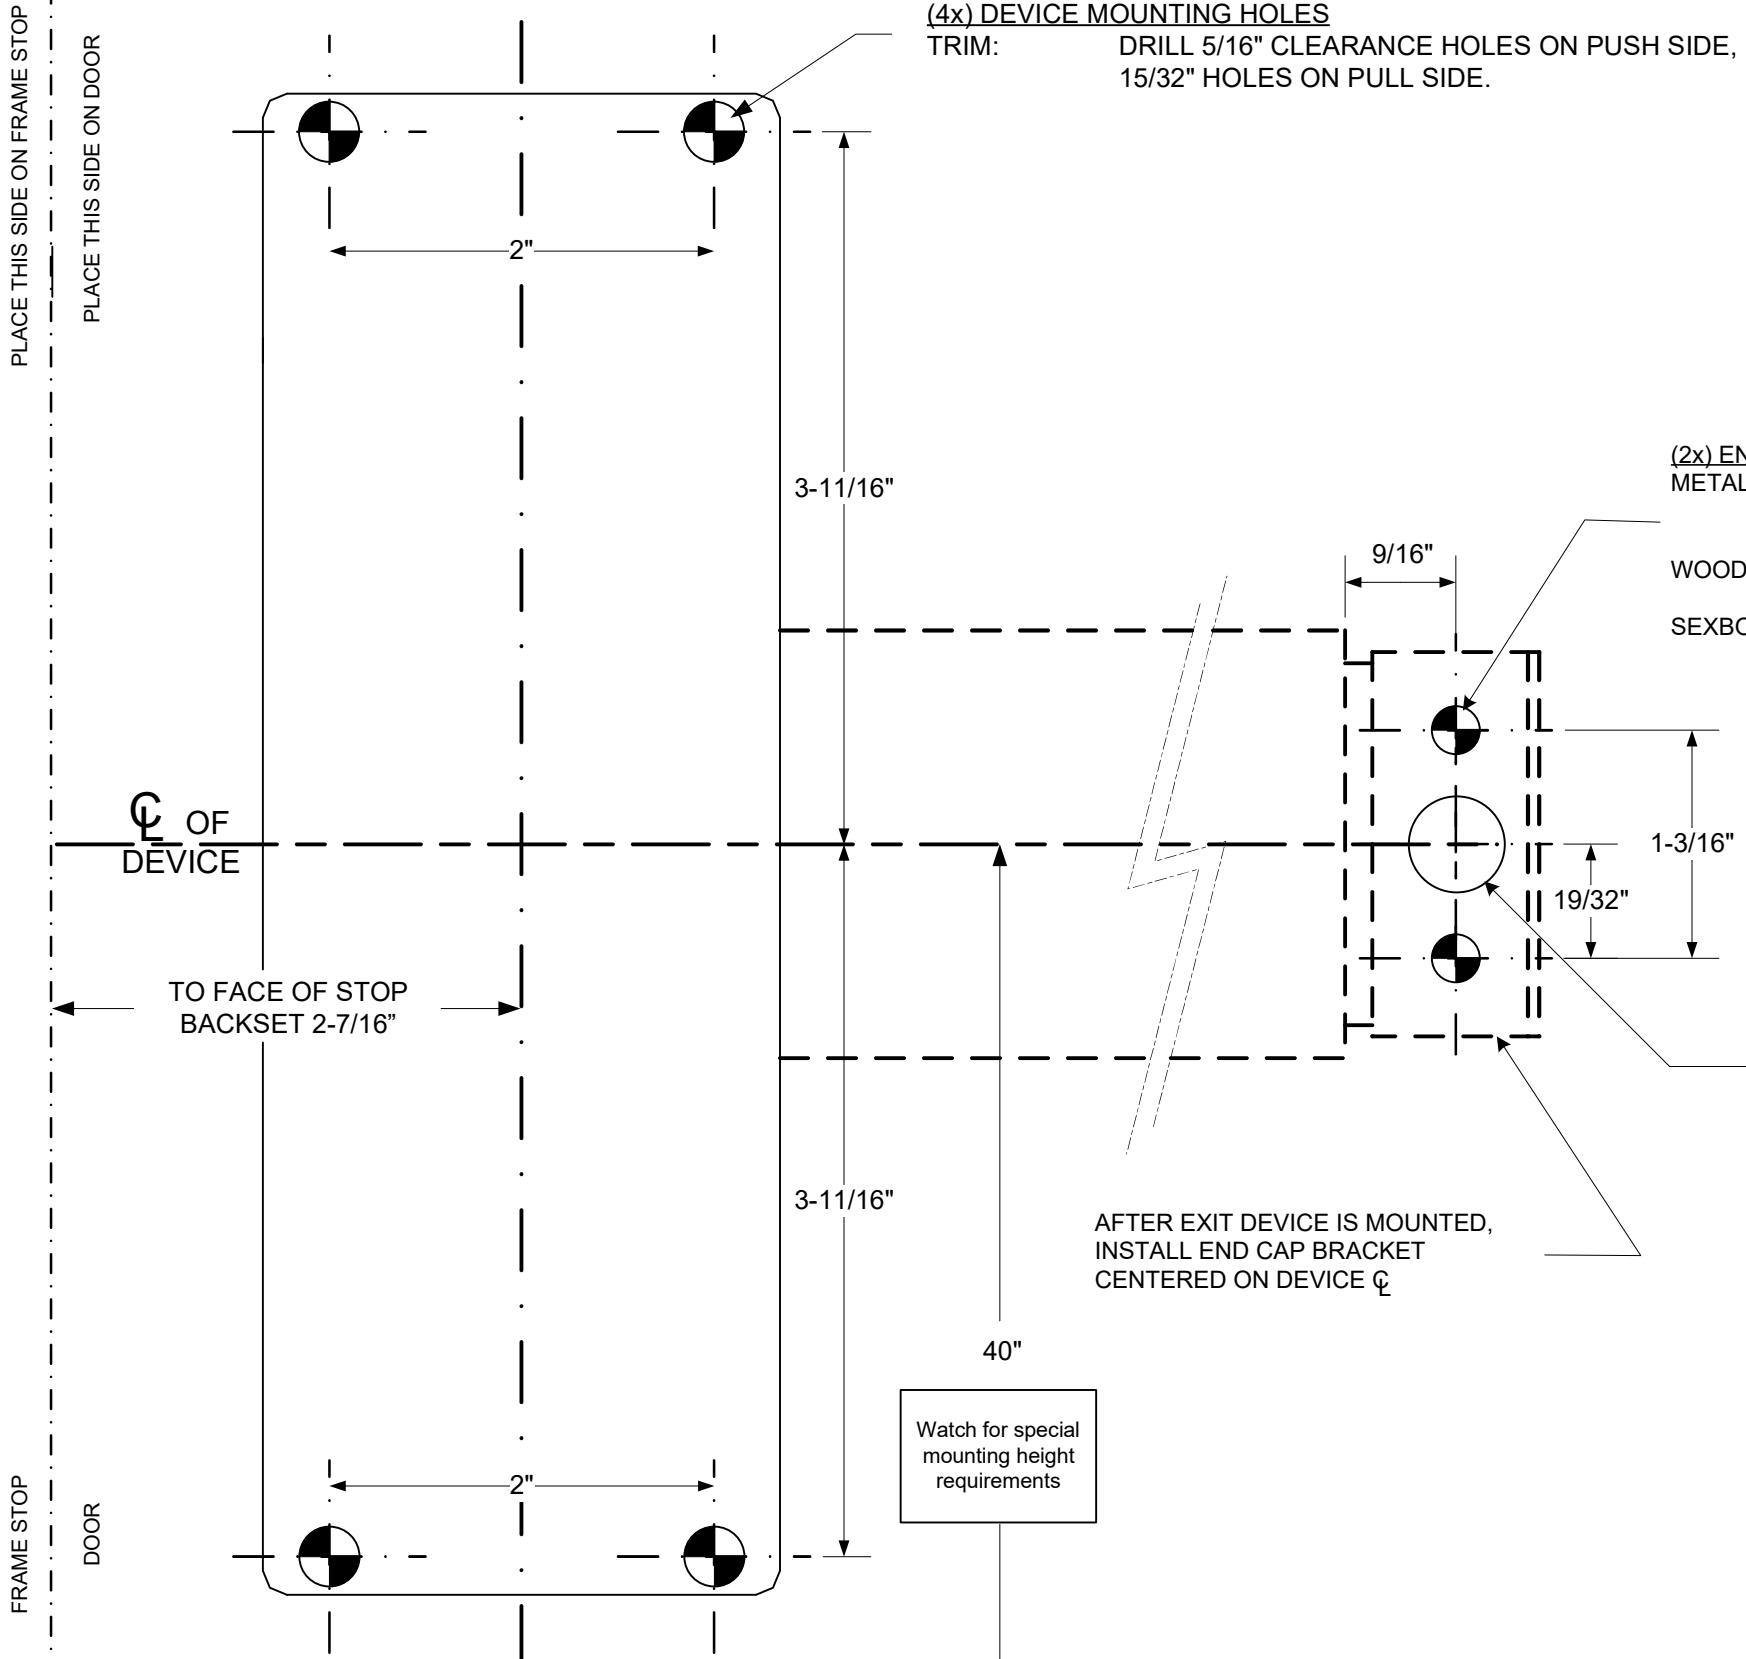

OPTIONAL 1/2" dia.  
 WIRE RUN

AFTER EXIT DEVICE IS MOUNTED,  
 INSTALL END CAP BRACKET  
 CENTERED ON DEVICE CL

Watch for special  
 mounting height  
 requirements

FINISHED FLOOR

THIS SIDE UP FOR RHR DOOR

FOLD HERE



**TOP LATCH  
TEMPLATE**

**(3x) Top Strike Holes**

METAL: DRILL / TAP FOR 1/4-20  
MACHINE SCREWS

WOOD: 1/8" PILOT DRILL

PLACE THIS SIDE ON  
TOP FRAME.

PLACE THIS SIDE ON  
DOOR SURFACE SIDE


**(2x) TOP LATCH HOLES**

METAL: DRILL / TAP FOR 1/4-20"  
MACHINE SCREWS

WOOD: PRE-DRILL 1/8" HOLES

LHR DOOR EDGE OR STOP FACE

RHR DOOR EDGE OR STOP FACE

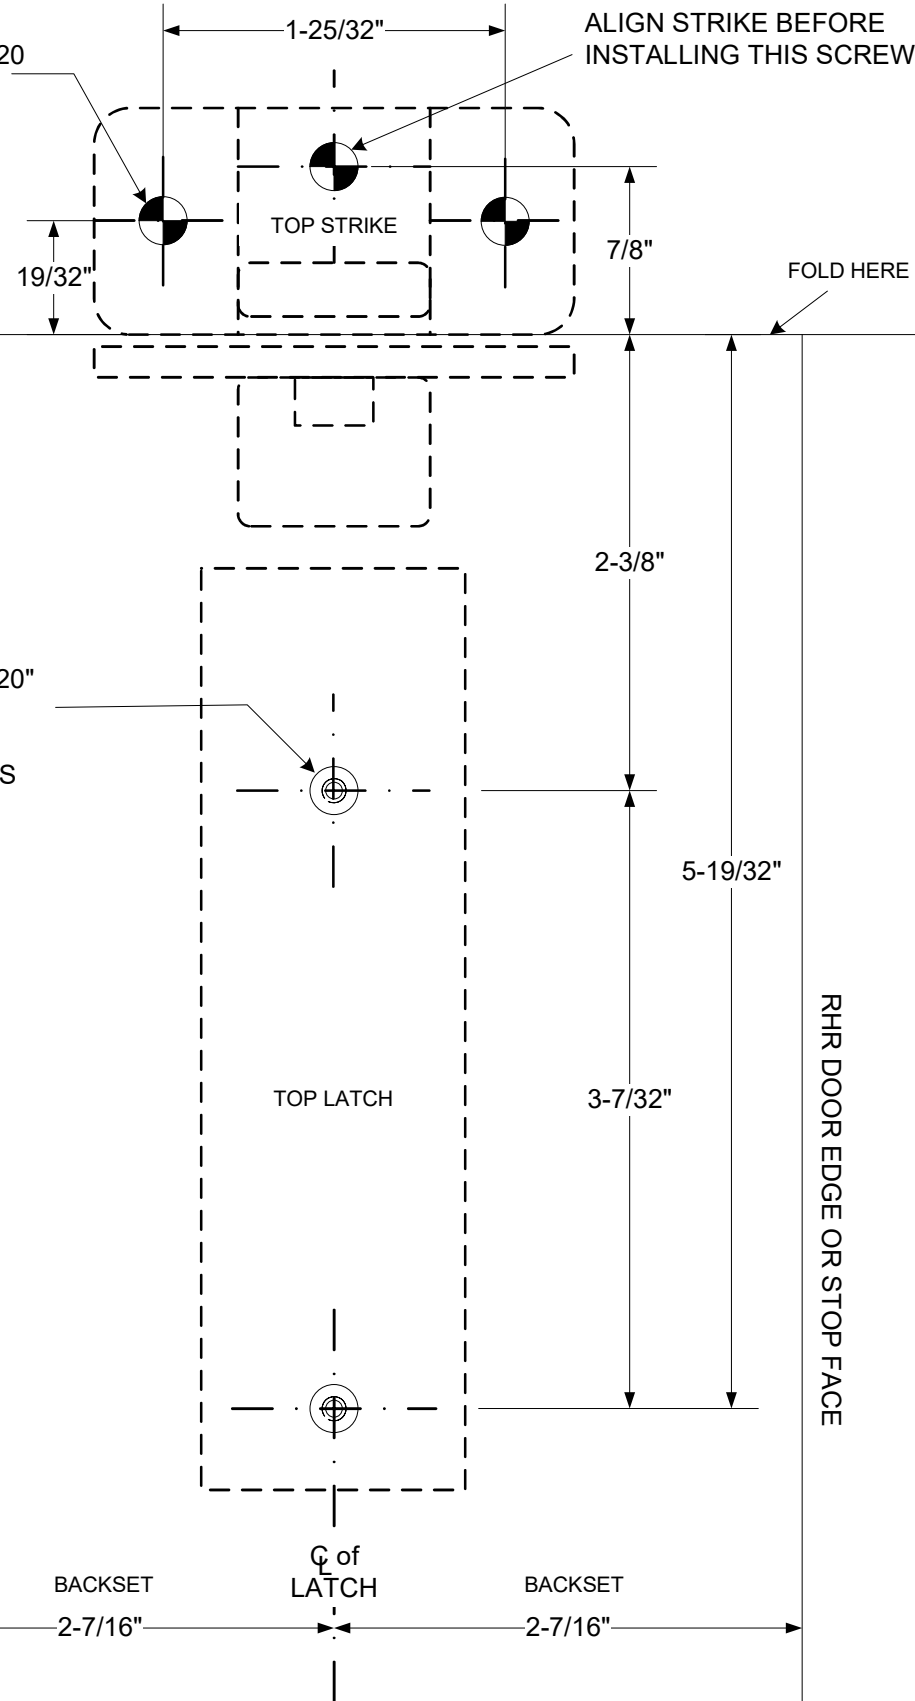

**BOTTOM LATCH  
TEMPLATE**

(NOT REQUIRED FOR LBR DEVICE)


**(2x) TOP LATCH HOLES**

METAL: DRILL / TAP FOR 1/4-20"  
MACHINE SCREWS

WOOD: PRE-DRILL 1/8" HOLES

LHR DOOR EDGE OR STOP FACE

RHR DOOR EDGE OR STOP FACE

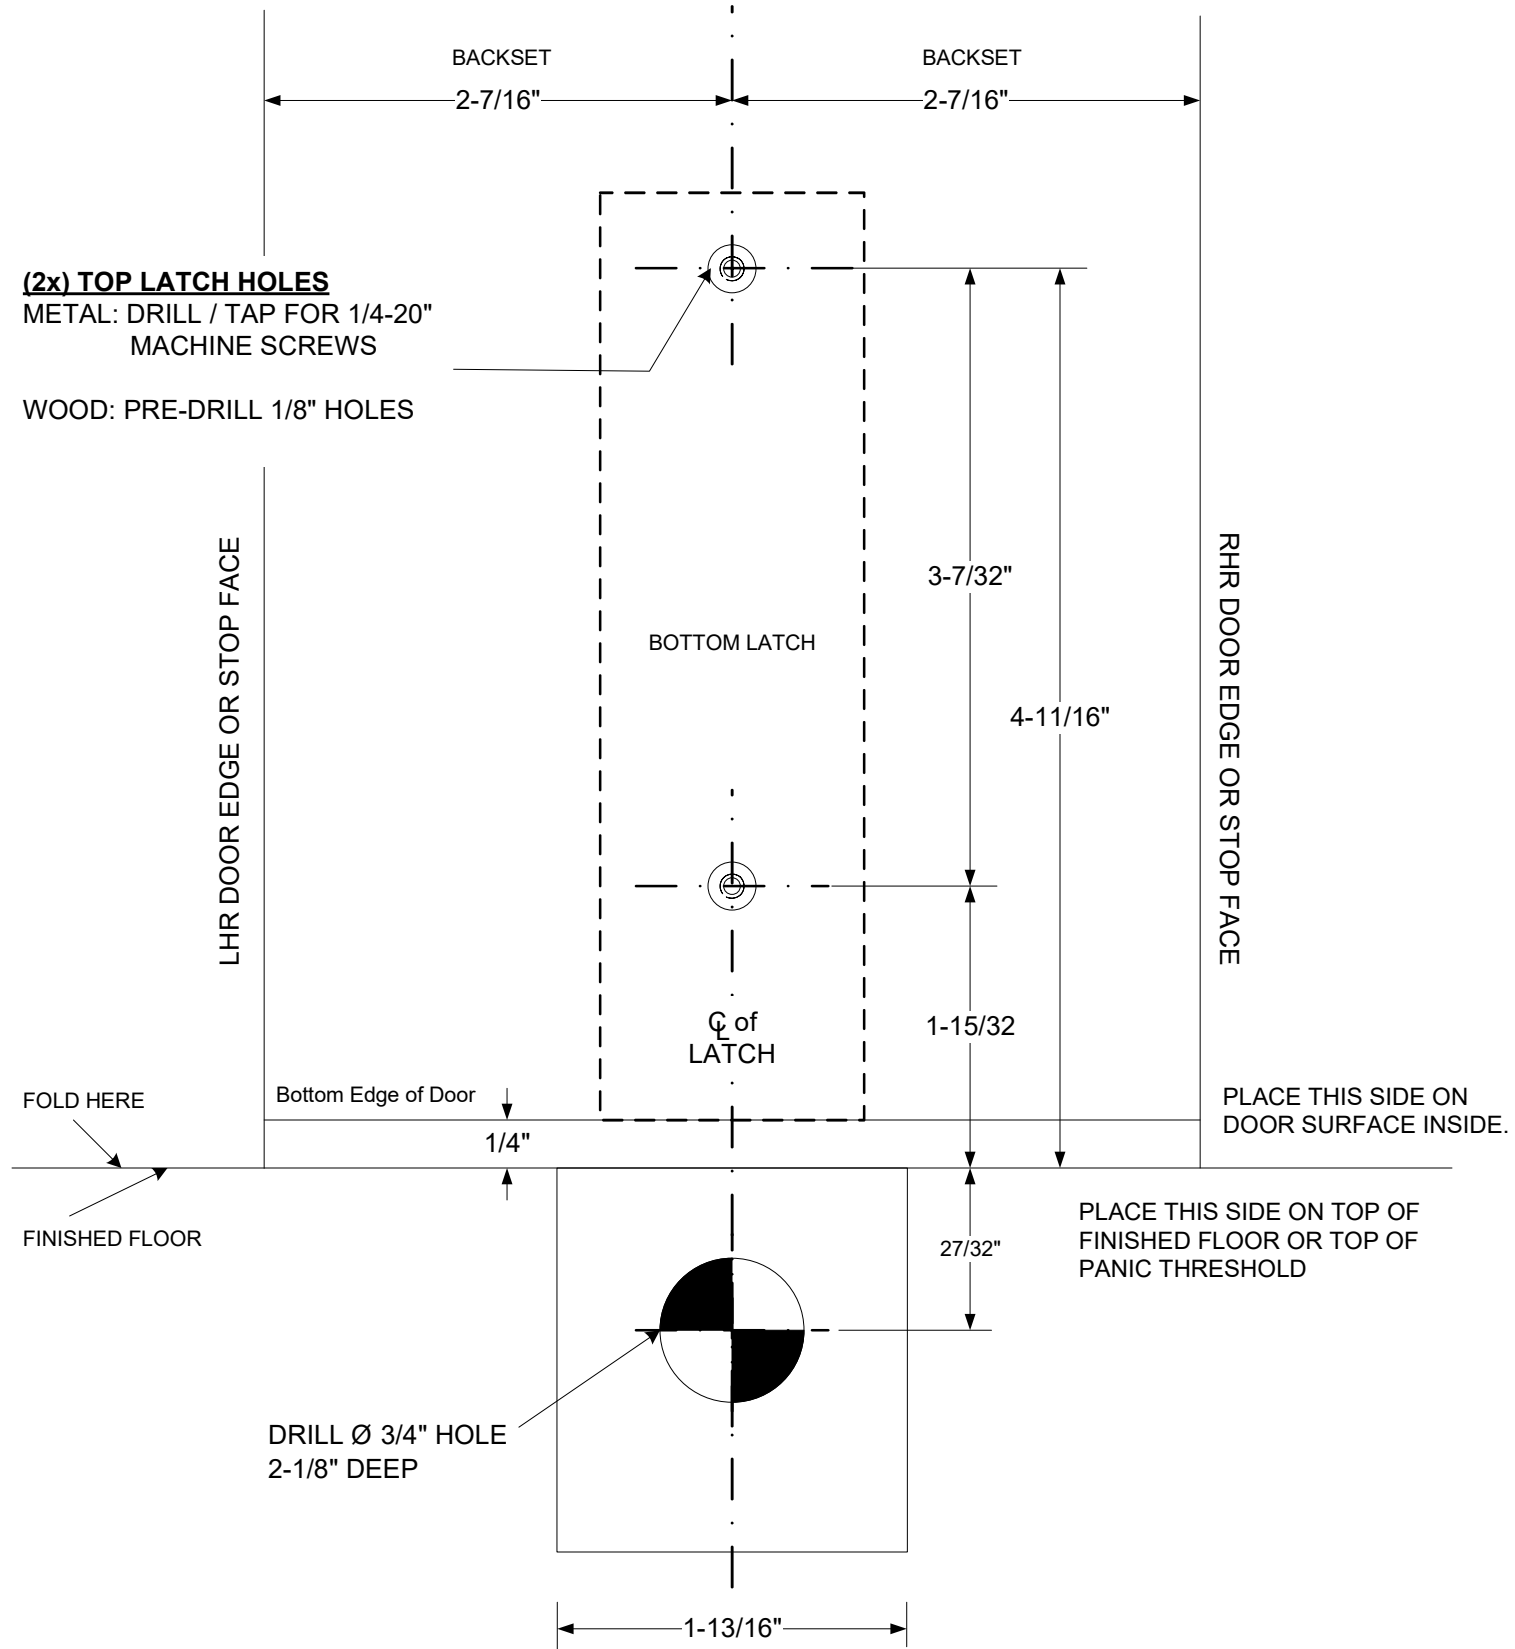

CUT HERE TO SEPARATE TOP TEMPLATE AND BOTTOM TEMPLATE



### TEMP-02 02 DUMMY TRIM

